
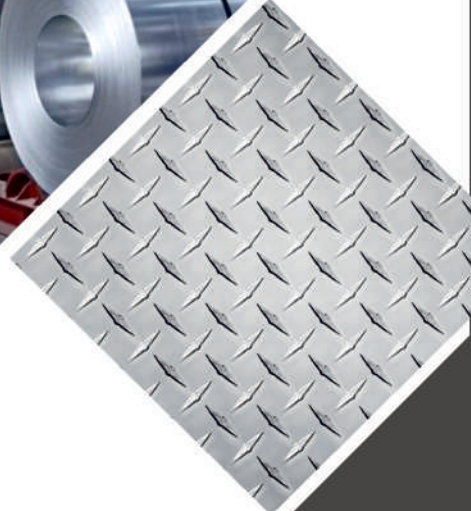


Since 1972

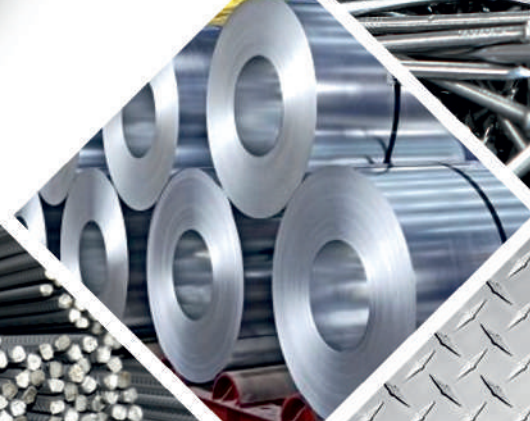

 **AKKATOĞLU**
Iron and Steel Industry Import-Export and Trade Company

www.akkatoglu.com

www.akkatoglu.com.tr

History

Akkatođlu Iron & Steel Company was established in Payas- Hatay, Turkey and operating since 1972.

Akkatođlu Iron and Steel are producing Mainly Cold Drawn Wire, Black Annealed Wire, Galvanized Wire, Barbed Wire, PVC Coated Fence Wire, Hot- Dip Galvanized Wire, Construction Nails, Concrete Nails, White & Steel; Red Roofing Nails with caps according to international production norms. With our strong customer portfolio, the company is also supplying steel products like reinforcement steel bar, wire rod, ribbed coil, wire mesh, Merchant Bars as black and hot-dip galvanized (Square, Round, Flat, T-bar, UPN, IPE, IPN, Eq. Angles), Transmission Mill, HRC, CR Coil, HDGC, Strips, Sheet; Plate, HDG Serrated Grated Mesh, ERW Hollow Section; Pipe, HDG Pipes.

Our products are exported to several countries of the world, in addition to the domestic market.

 **AKKATOĐLU**
Iron and Steel Industry Import-Export and Trade Company



Twisted Wire

Wtel Diameter: 1,20mm x 6 Black Wire
Tensile Strength: Annealed Soft
Packaging: 10 kg Coils
Quality: SAE1006, SAE1008



Black Annealed Wire

Size: Min 0,90mm - Max 5,00mm
Tensile Strength: Min 300N/mm²
Max 450N/mm²
Packaging: In Coils Between 25-50 kg
Quality: SAE1006, SAE1008



Galvanized Wire

Size: Min 1,50mm - Max 8,00mm
Galvanized: Min 40gr/m² - Max 360gr/m²
Tensile Strength: Min 400N/mm² - Max 1000N/mm²
Packaging: In Rosette Coils Between 50-1000 kg
Quality: SAE1006, SAE1008, SAE1010, SAE1022



Barbed Wire


Wtel Diameter: Min 1,5mm - Max 3,00mm
Barbs Diameter: Min 1,5mm - Max 2,50mm
Tensile Strength: Min 400N/mm² - Max 1000N/mm²
Barbs Range: 10cm up to 30cm
Packaging: In Coils Max 35 kg Or Max 500 meters Per Coil
Quality: SAE1006, SAE1008, SAE1010, SAE1022





PVC Coated Wire

Thickness: Min 1,60mm - Max 5,00mm
PVC Covering: Min 2,50mm - Max 6,00mm
Tensile Strength: 450N/mm²
Packaging: In Coils Between 100/800 kg
Color Code: RAL 6005, RAL 9005, RAL 1001
Quality: SAE1006, SAE1008, SAE1010, SAE1022

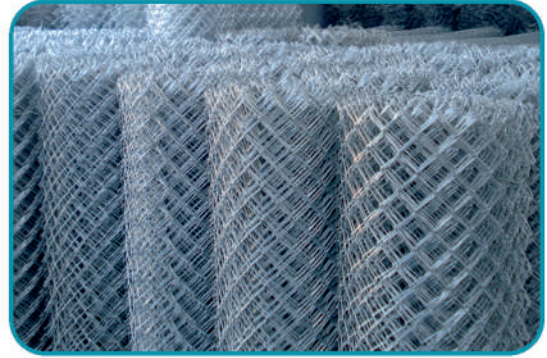

Fence Wire

Size: Min 1,0mm - Max 3,0mm
Roll Length: 20m, 25m
Roll Height: 100cm, 120cm, 150cm, 200cm
Pitch Size: 60x60



Cold Drawn Wire

Size: Min 1,00mm - Max 8,00mm
Tensile Strength: Min 500N/mm²
Max 1000N/mm²
Packaging: In Coils Between 100-800 kg
Quality: SAE1006, SAE1008, SAE1010, SAE1022



Cold Drawn Rebar Cold Drawn Round Bar

Size: Min 3,00mm - Max 10,00mm
Length: 4000mm - 1200mm
Packaging: Max 3 Ton
Quality: SAE1006/1008/1010 EN 10025



Construction Nail

Diameter: 2,40mm up to 6,00mm
Length: 40mm up to 200mm
Packing: 5kg or 25kg
Quality: SAE1006 - SAE1008



Concrete Nail

Diameter: 3,2mm x 1" - 3,6mm X 2" - 3,8mm x 2"
4,00mm x 2 1/2" -4,2mm x 3"
Coating: Hot Dipped Galvanized
Length: 40mm up to 200mm
Packing: 25kg - Quality: High Carbon Steel



Red Head Roofing Nail Galvanized Roofing Nail






Rebar

Size: Min 8mm - Max 32mm
Length: 4000mm - 1200mm
Package Weight: Max 3 Ton
Quality: American /Canadian /Euronorm /British
German /Israeli /Maroc /Portuguese /Iraq /Ethiopian
Japanese /Korean Standarts




Wire Rod

Size: Min 5,5mm - Max 16mm
Package Weight: Max 5 Ton
Quality: DIN17100, EN10025, ST37-2, SAE1012
SAE1010, SAE1008, SAE1006, BS449 GR250

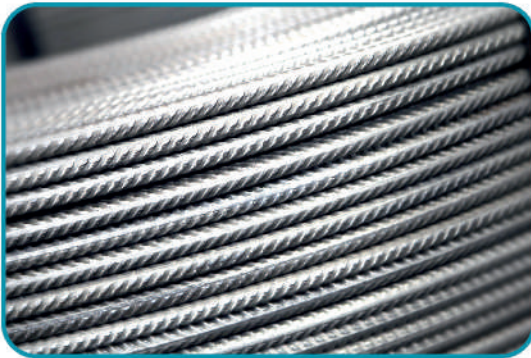

Ribbed Coil

Size: Min 8mm - Max 32mm
Package Weight: Max 3 Ton
Quality: American /Canadian /Euronorm /British
German /Israeli /Maroc /Portuguese /Iraq /Ethiopian
Japanese /Korean Standarts

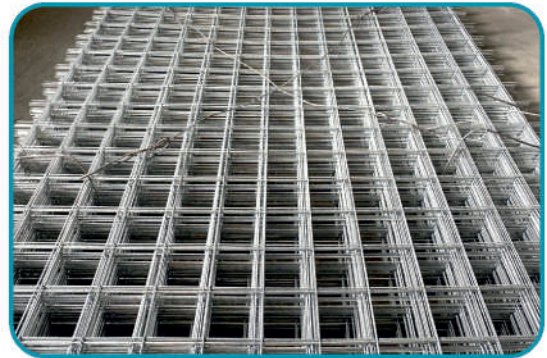

Steel and Galvanized Wire Mesh


Wire Diameter: Min 3,5mm - Max 12,00mm
Quality: SAE1006, SAE1008, SAE1010, SAE1022





Hot Rolled Steel Coil

Thickness: 1,00mm - 25,00mm
Width: 800mm - 2000mm
Roll Weight: Max 30 Ton
Quality: EN 10025-2

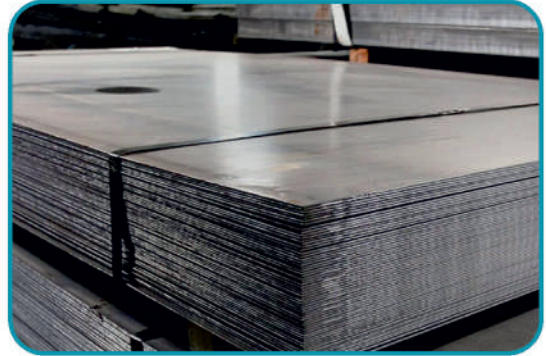


Hot Rolled Steel Sheet

Thickness: 1,00mm - 80,00mm
Width: 800mm - 3200mm
Size: 1000mm - 12000mm
Roll Weight: Max 10 Ton
Quality: EN 10025-2



Hot Dipped Galvanized Coil


Thickness: 0,25mm - 3,00mm
Width: 800mm - 1530mm
Roll Weight: Min 5 Ton - Max 35 Ton
Quality: DX51D+Z-DX52D+Z-DX53D+Z-DX54D+Z-S220GD+Z-S250GD+Z-S280GD+Z-S320GD+Z-S350GD+Z

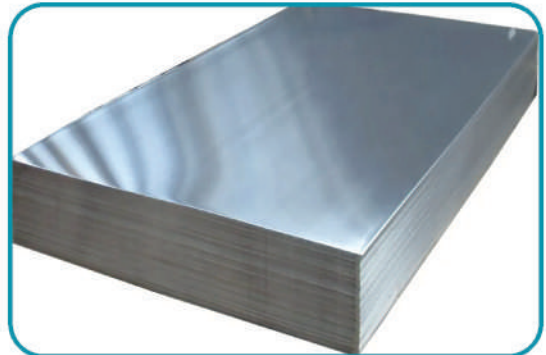

Hot Dipped Galvanized Sheet


Thickness: 0,25mm - 3,00mm
Width: 800mm - 1530mm
Size: 1000mm - 6000mm
Roll Weight: Max 10 Ton
Quality: DIN EN 10346



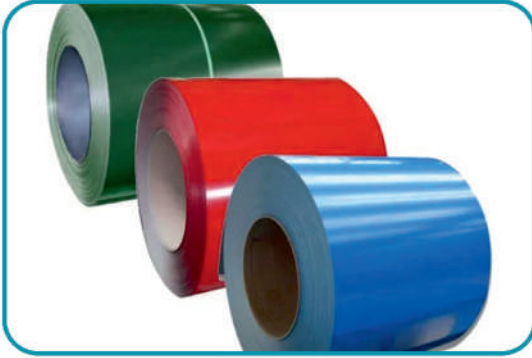


Pre Painted Galvanized Coil

Thickness: 0,25mm - 1,20mm - Width: 800mm - 1550mm
Galvanized: 60-275 GR/M2 - Roll Weight: Max 10 Ton
Paint Types: Polyester - Plastisol - PvdF - Purpa
Polyester Wrinkle Poliuretan
Quality: DX51D+Z-DX52D+Z-DX53D+Z-DX54D+Z-S220GD+Z-
S250GD+Z-S280GD+Z-S320GD+Z-S350GD+Z

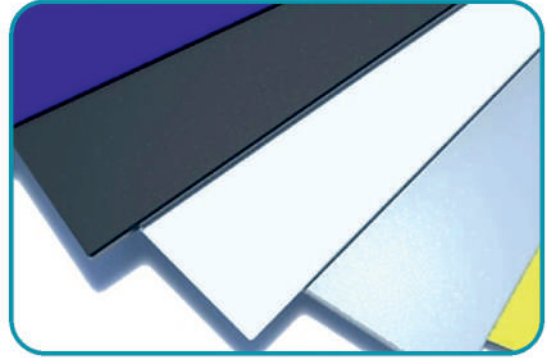


Pre Galvanized Sheet

Thickness: 0,25mm - 1,20mm - Width: 800mm - 1550mm
Length: 800mm - 1550mm - Galvanized: 60-275 GR/M2
Package Weight: Max 8 Ton
Paint Types: Polyester - Plastisol - PvdF - Purpa
Polyester Wrinkle Poliuretan
Quality: Dx51d+z-dx52d+z-dx53d+z-dx54d+z-s220gd+z-
s250gd+z-s280gd+z-s320gd+z-s350gd+z

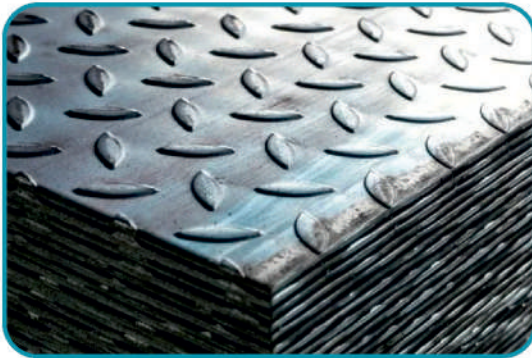

Chequered Plate Diamond Pattern

Thickness: 1.40mm - 16mm
Width: 800mm - 1550mm
Size: 2000mm/2500mm/3000mm/6000mm
Quality: EN 10025-2

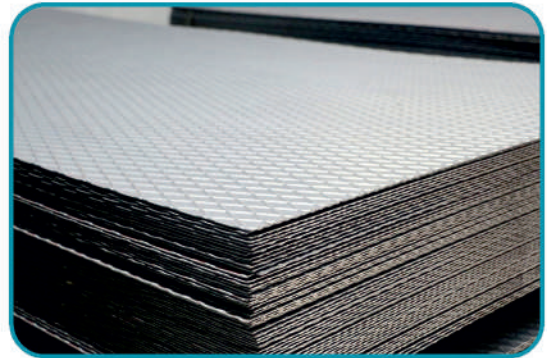

Chequered Plate Teardrop

Thickness: 1,5/2,5mm - 15/16mm
Width: 1000mm/1250mm/1500mm
Size: 2000mm/2500mm/3000mm/6000mm
Quality: EN 10025-2



Industry Pipe

Outer Diameter: 12mm - 406,4mm
Thickness: 1,00mm - 12,00mm
Length: 3-12 meter
Quality: DIN2394 -TS EN10305 -3 -TS EN 10219-2



Galvanized Threaded Coupled Pipe Galvanized Construction Pipe Galvanized Plain End Pipe

Outer Diameter: 1-2
Thickness: 1/2 inç - 12 inç
Length: 4-12 meter
Quality: DIN 1626, EN 10255 ASTM A53






Hollow Section

Thickness: 0,70mm - 10,00mm
Exterior Section: 10x10mm - 200x300 mm
Length: 4000mm - 12000mm
Package Weight: Max 3 Ton
Quality: DIN2395, TS5317, TS EN 10219, TS EN 10305,
(S235 JR/ S275 JR / S355 JR ACC TO EN 10025)




PreGalvanized Hollow Section

Thickness: 1mm - 8,00mm - Length: 4000mm - 12000mm
Size: 10x10mm - 175x175 mm
Bundle Weight: Max 3 Ton
Zinc Coating: Min 60gr/m²
Quality: DIN2395, TS5317, TS EN 10219, TS EN 10305
(S235 JR/ S275 JR / S355 JR ACC TO EN 10025)

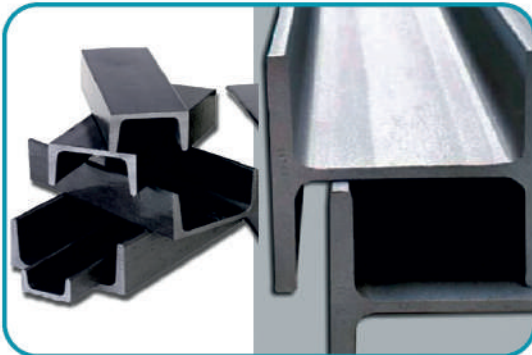

Equal Angles, IPE, UPN, HEA & HEB

Thickness: Min 20x20x2,50mm
Max 150x150x18,00mm
Length: 4000mm-12000mm
Package Weight: Max 3 Ton
Quality: S235 JR/S275 JR / S355 JR

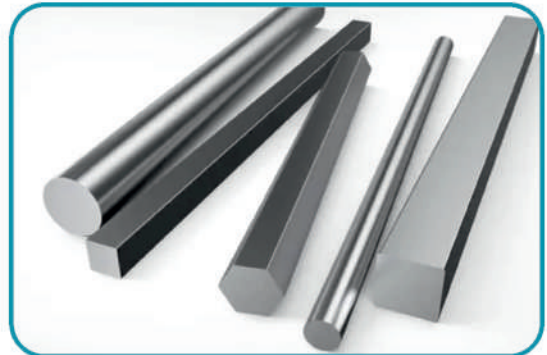

Flat, Square and Round Bar

Length: 4000mm - 12000mm
Package Weight: Max 3 Ton
Quality: S235 JR/S275 JR / S355 JR ACC TO EN 10025,
ASTMA A36 / ASTM A 529 GR 50 ACC TO A6,
ST37-2, ST44-2, ST52-3



 **AKKATOĞLU**

Iron and Steel Industry Import-Export and Trade Company

Nail & Wire Producer



 **AKKATOĞLU**
Iron and Steel Industry Import-Export and Trade Company

www.akkatoglu.com

www.akkatoglu.com.tr



Head Office

+90 326 755 12 40
+90 326 755 85 85

Mobile & Whatsapp

+90 543 302 90 94
+90 543 302 90 97
+90 536 776 78 72



Payas Organize Sanayi Bölgesi
Sükrü Kanatlı Cad. No:2
Payas / Hatay / Türkiye



steel@akkatoglu.com
sales@akkatoglu.com
marketing@akkatoglu.com
foreigntrade@akkatoglu.com