



BMS

Çelik Hasır Sanayi Ve Tic. A.Ş.



➤ Our factory, which was established in **1971** in Manisa Organized Industrial Zone, has been producing iron-steel and mesh products since **2004**, and it continues on its way under the name of **BMS ÇELİK HASIR SAN. VE TİC. A.Ş.** from the day it started production, it has been one of the leading iron and steel companies in its sector that have developed its technology, increased its capacity, and matched its quality with world standards.

➤ **BMS ÇELİK HASIR SAN. VE TİC. A.Ş.** is now the most modern wire mesh factory in Turkey, having the highest capacity. With the recent addition of machinery and an enlarged covered area, the facility achieved a capacity of **70.00 tons/year** of welded wire mesh and **120.000 tons/year** of cold rolled bars.

➤ **BMS ÇELİK HASIR SAN. VE TİC. A.Ş.** operating on a total area of **12.000 sq.m.**, consisting of **7.000 sq.m.** covered and **5.000 sq.m.** open area, produces mainly according to Turkish Standards and also to generally accepted standards throughout the World, including ASTM, DIN, BS and BSI.

➤ **BMS ÇELİK HASIR SAN. VE TİC. A.Ş.** is responsible for timely delivery with a wide range of stocks and has **TSE and ISO certificates**. It is engaged in the supply and sale of ribbed and plain rebar, ribbed coil, construction nail, construction wire, and all iron and steel products.


➤ Our company, which makes domestic and foreign production without making any concessions on quality, exports to more than **50 countries on 5 continents** by producing environmentally friendly and in accordance environmental legislation with international standards.

+90 236 236 00 37

+90 236 233 34 11

info@bmscelikhasir.com.tr

Organize Sanayi Bölgesi Atatürk Cad. No: 3 Manisa - Türkiye

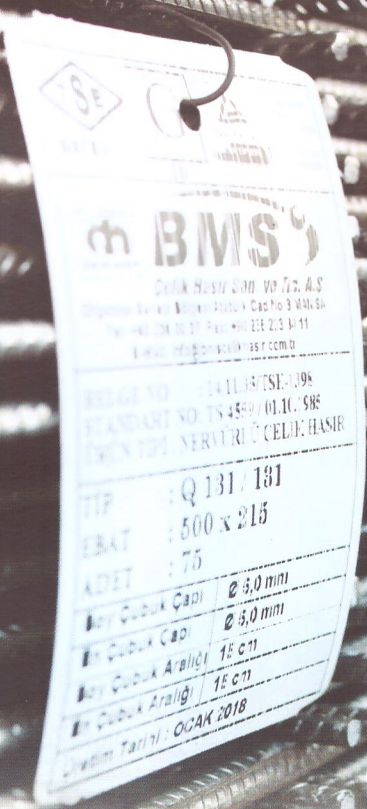

Our products;

- Welded Wire Mesh
- Cold-drawn Rebar 4 mm to 12 mm
- Cold-drawn Bar in Coil
- Hot rolled Rebar 8 mm to 32 mm
- Angles, Hollow section
- Construction and Concrete Nail
- Annealed Wire, Galvanized Wire, Barbed Wire
- Helical braided wire, PVC coated wire, Razor wire
- Panel Wire Mesh and Equipment

MESH ACCORDING TO THE BRITISH STANDARD - BS 4483

TYPE OF MESH	DIMENSIONS (mm)		SPACE (mm)		DIAMETER (mm)		WEIGHT Kg/Pcs	FOOTPRINT m2/mt
	Lenght	Width	Lenght	Width	Lenght	Width		
A 98	4800	2400	200	200	5,0	5,0	17,74	649,35
A 142	4800	2400	200	200	6,0	6,0	25,57	450,45
A 193	4800	2400	200	200	7,0	7,0	34,79	331,31
A 252	4800	2400	200	200	8,0	8,0	45,5	253,16
A 393	4800	2400	200	200	10,0	10,0	70,96	162,34
B 196	4800	2400	100	200	5,0	7,0	35,14	327,87
B 283	4800	2400	100	200	6,0	7,0	42,97	268,1
B 385	4800	2400	100	200	7,0	7,0	52,19	220,75
B 503	4800	2400	100	200	8,0	8,0	68,31	168,63
B 785	4800	2400	100	200	10,0	8,0	93,57	122,85
B 1131	4800	2400	100	200	12,0	8,0	125,57	91,74
C283	4800	2400	100	400	6,0	6,0	32,03	2,78
C285	4800	2400	100	400	7,0	6,0	41,24	3,58
C503	4800	2400	100	400	8,0	6,0	51,96	4,51
C636	4800	2400	100	400	9,0	6,0	63,94	5,55
C785	4800	2400	100	400	10,0	6,0	77,41	6,72

