

RAM GLOBAL

*create comfort
of your home
with insulation"*



PRODUCT CATALOGUE


[f](#) [t](#) [@](#) [in](#) [v](#) ramglobaltr

www.ramglobal.com.tr





"Solutions partner of insulation"



**Heat Insulation and
Energy Efficiency**



**Sound Insulation
and Comfort**



**Fire Insulation
and Safety**



**Water Vapor
Permeability**



Stone wool is a natural insulation material obtained with a special process in which volcanic rocks such as basalt, dolomite and diabase are melted at 1400-1600°C and turned into lava and then lava is transformed into fiber and mixed with a binding agent. With its dimensional stability, it is not affected by the temperature transitions that may occur. High temperature resistant Stonewool stone wool insulates heat and sound with a single material. It is also a safe material for fire insulation. Stone wool prevents humidity from being

held in buildings and negative effects of it thanks to its low diffusion resistance by acting like a good water repellent. Our production facilities are located in the organized industrial zone of Kayseri-İncesu central district. It is the largest facility of Turkey on a 250 thousand m2 of land with 50 thousand m2 enclosed area, with its 100% domestic capital. Equipped with advanced technology, the facility can produce in any size and type with 80 thousand tons/year capacity.

Our Policy; Honesty, Reliability, Producing Quality Product and Attach importance to after-sales service, because we don't want to work with our clients just for one time.



FOR THE FIRST TIME IN THE SECTOR, WITH
TSE
DOUBLE STAR CERTIFICATE



100%
DOMESTIC
CAPITAL



"Solutions partner of insulation"

Partition Wall Board

Product description: It does not need to have high compressive strength but can carry itself in vertical position. Stonewool board without facing and It is used in areas where heat, sound, fire insulation and acoustic details are required. Supplied with shrinked packages

Application areas


It can be used in the interior walls, stairs and lift spaces of all kinds of buildings, and for the heat, sound and fire insulation of outer walls that can be coated. It can be used in places where there may be condensation problem depending on the need.

Application principles

It is used as insulation for heat, sound, fire and acoustic purposes inside the cage systems formed with the wooden and metal carrier constructions. Stone wool plates should stand in vertical direction. If necessary, the insulation should be partially secured to the surface with the suspension pins




RAM
GLOBAL

Product Code	Density	Thickness	Size	Package		
	kg / m ³	mm	mm x mm	piece	m ²	
RG-PWB4030	40	30	600 × 1200	15	10.80	2.833
RG-PWB4040	40	40	600 × 1200	12	8.64	2.125
RG-PWB4050	40	50	600 × 1200	8	5.76	1.700
RG-PWB4060	40	60	600 × 1200	8	5.76	1.416
RG-PWB4070	40	70	600 × 1200	6	4.32	1.214
RG-PWB4080	40	80	600 × 1200	6	4.32	1.063
RG-PWB40100	40	100	600 × 1200	4	2.88	850
RG-PWB40120	40	120	600 × 1200	4	2.88	700
RG-PWB5030	50	30	600 × 1200	15	10.80	2.833
RG-PWB5040	50	40	600 × 1200	12	8.64	2.125
RG-PWB5050	50	50	600 × 1200	8	5.76	1.700
RG-PWB5060	50	60	600 × 1200	8	5.76	1.416
RG-PWB5070	50	70	600 × 1200	6	4.32	1.214
RG-PWB5080	50	80	600 × 1200	6	4.32	1.063
RG-PWB50100	50	100	600 × 1200	4	2.88	850
RG-PWB50120	50	120	600 × 1200	4	2.88	700
RG-PWB7030	70	30	600 × 1200	15	10.80	2.833
RG-PWB7040	70	40	600 × 1200	12	8.64	2.125
RG-PWB7050	70	50	600 × 1200	8	5.76	1.700
RG-PWB7060	70	60	600 × 1200	6	4.32	1.416
RG-PWB7070	70	70	600 × 1200	6	4.32	1.214
RG-PWB7080	70	80	600 × 1200	5	3.60	1.063
RG-PWB70100	70	100	600 × 1200	4	2.88	850
RG-PWB70120	70	120	600 × 1200	4	2.88	700

Transport and Storage, Reminders on Loading, Unloading

- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not be stepped on or used as a step.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ It should be done in closed areas in rainy weather.

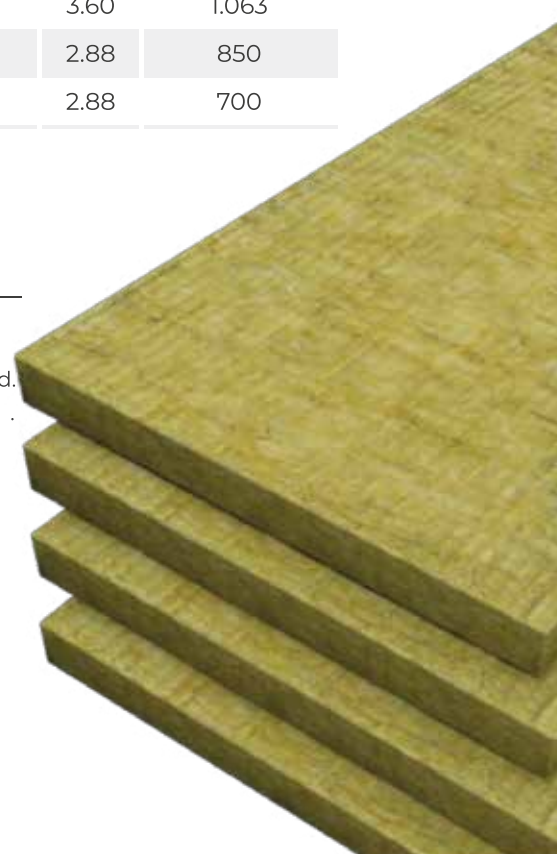

"Solutions partner of insulation"

Insulation Mattress

Product description: Roof Blanket stone wool produced for heat, sound and fire insulation. Once the roof surface is cleaned and Stone Wool Roof Blanket will be laid freely with no openings in the joints. Then the roof door is opened and walkway is constructed with planks on the wedges

Application areas

It is used for heat, sound and fire insulation in roofs such as gable roof, free standing roof and hipped roof.

Application principles

Roof mattress without facing and with facing with aluminium foil on one or both side. Used at the roofs depending on the roof parts by laying and spreading method.

Product Code	Density	Thickness	Size	Roll		
	kg / m ³	mm	mm x mm	piece	m ²	
RG-RB40100	40	100	1200 x 5000	1	6.00	1.800
RG-RB40120	40	120	1200 x 3000	1	3.60	1.200
RG-RB40140	40	140	1200 x 3000	1	3.60	720

Transport and Storage, Reminders on Loading, Unloading

- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not be stepped on or used as a step.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ It should be done in closed areas in rainy weather.



RAM
GLOBAL

Oven Board

Product description: Oven board high temperature resistant, aluminum foil or bare stone wool board and It is used for protecting the temperature..

Application areas

Since the production is done for the firms manufacturing the furnace (oven), it is applied according to the details created by the producers.

Product Code	Density	Thickness	Size	Package		
	kg / m ³	mm	mm x mm	piece	m ²	
RG-OB4030	40	30	600 x 1200	15	10.80	2.833
RG-OB4040	40	40	600 x 1200	10	7.20	2.125
RG-OB4050	40	50	600 x 1200	8	5.76	1.700

Transport and Storage, Reminders on Loading, Unloading

- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not be stepped on or used as a step.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ It should be done in closed areas in rainy weather.



"Solutions partner of insulation"


Solar Collector Board

Product description: After spreading stonewool at the bottom of the solar collectors, connection between the collector and stonewool is cut by covering aluminium foil or black glass tissue on the stonewool. By means of the bakalite binding agent (formaldehyde) used in the production of stonewool, stains formed because of the damp glass exposed the sunlight is prevented.

Application principles

Stone wool board produced in different sizes for solar collectors. As it is produced for the collector manufacturers, it is prepared according to the requirements of the application details

Product Code	Density	Thickness	Size	Package		
	kg / m³	mm	mm x mm	piece	m²	
RG-SCB4030	40	30	1100 x 1700	9	16.83	2.833
RG-SCB4040	40	40	1100 x 1700	6	11.22	2.125
RG-SCB4050	40	50	1100 x 1700	6	11.22	1.700

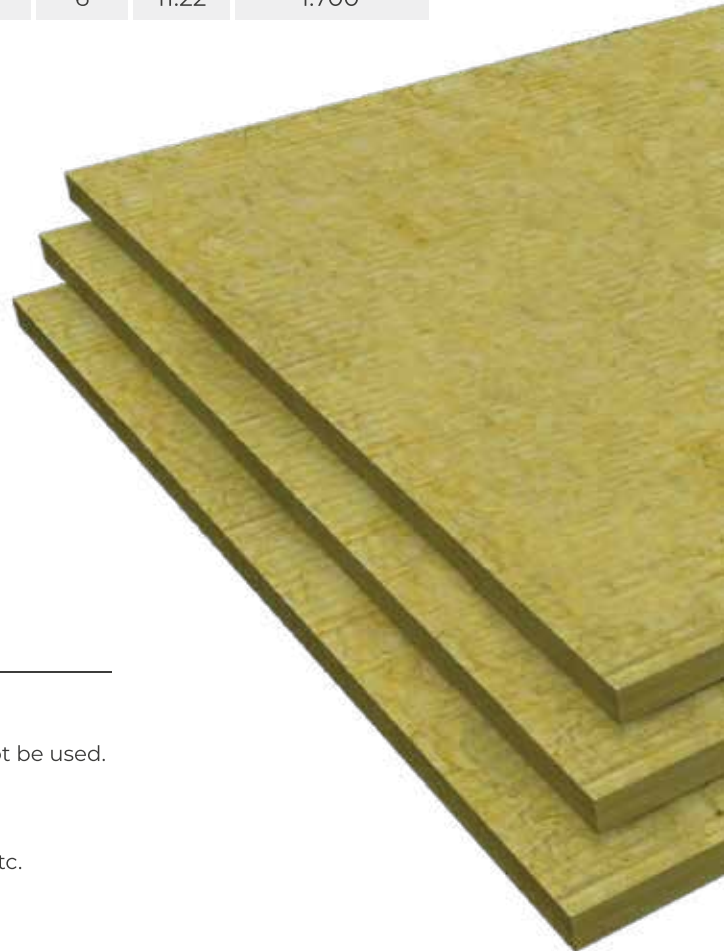

Transport and Storage, Reminders on Loading, Unloading

- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not be stepped on or used as a step.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ It should be done in closed areas in rainy weather.

RAM
GLOBAL

Air Conditioner Board

Product description: One side is aluminum coated stone wool or bare stone wool sheet. It is applied in all technical channel details requiring heat, sound and fire insulation. Air condition board stone wool can be produced as an air conditioning board, aluminum foil, yellow glass tissue or black glass tissue cover.


Application principles

It is used air conditioning ducts and Ventilating ducts
Boards are to be fixed through insulation hanger pins that will be fixed outside the air conditioning ducts

Product Code	Density	Thickness	Size	Package		
	kg / m ³	mm	mm x mm	piece	m ²	
RG-ACB6030	60	30	600 x 1200	15	10.80	2.833
RG-ACB6040	60	40	600 x 1200	12	8.64	2.125
RG-ACB6050	60	50	600 x 1200	8	5.76	1.700
RG-ACB7030	70	30	600 x 1200	15	10.80	2.833
RG-ACB7040	70	40	600 x 1200	12	8.64	2.125
RG-ACB7050	70	50	600 x 1200	8	5.76	1.700

Transport and Storage, Reminders on Loading, Unloading

- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not be stepped on or used as a step.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ It should be done in closed areas in rainy weather.

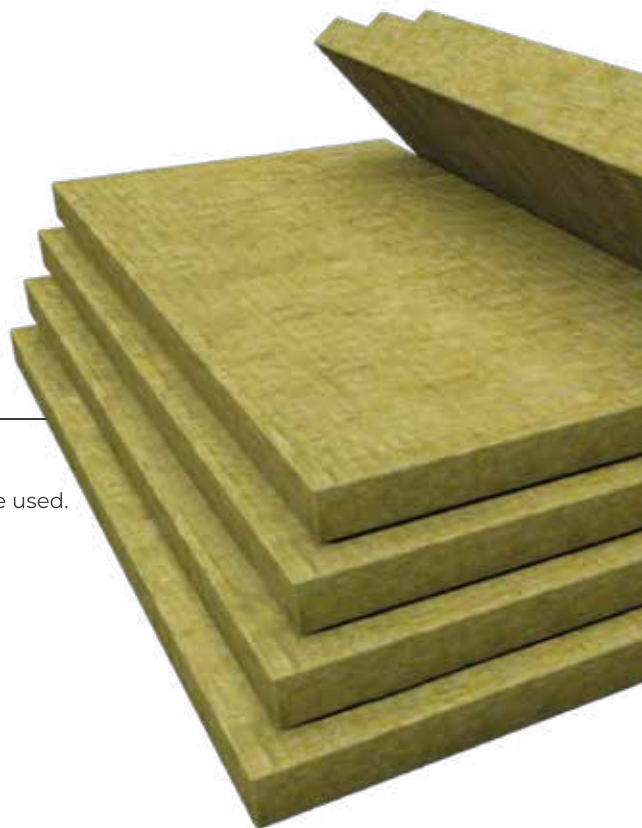

"Solutions partner of insulation"

Aluminum Foil Air-Conditioner Plate


Product description: It is an aluminum coated stone wool or bare stone wool plate. It is applied in all technical channel details requiring heat, sound and fire insulation. Ram Global stone wool can be produced as an air conditioning plate, aluminum foil, yellow fiberglass or black fiberglass cover.

Application areas

It is used for heat, sound and fire insulation in air-conditioning channels and air-conditioning cells.

Application principles

Plates are to be fixed through insulation hanger pins that will be fixed outside the air conditioning ducts.

Product Code	Density	Thickness	Size	Package		 ~ m ²
	kg / m ³	mm	mm x mm	piece	m ²	
RG-FL7030	70	30	600 x 1200	15	10.80	2.833
RG-FL7040	70	40	600 x 1200	12	8.64	2.125
RG-FL7050	70	50	600 x 1200	8	5.76	1.700



Transport and Storage, Reminders on Loading, Unloading

- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not be stepped on or used as a step.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ It should be done in closed areas in rainy weather.

RAM
GLOBAL

Sandwich Panel Board

Product description: Sandwich Panel board is produced specially produced for heat, sound and fire safety for sandwich panel producers. It is used in all industrial buildings, storage areas, and roof and facade panels for heat, sound and fire safety.

Application areas


It is used in all industrial buildings, storage areas, and roof and facade panels for heat, sound and fire safety.

Application principles

We are very professional for the sandwich panel stonewool production and we are producing all over the world producers, Since it is intended for the firms manufacturing sandwich roof and facade, it is produced depending on the details of the manufacturing companies.

Product Code	Density	Thickness	Size (mm)	In-Pack Pieces	m ² / Package
RG-SPB9075	90	75	1200 x 2000	28	67.20
RG-SPB9080	90	80	1200 x 2000	28	67.20
RG-SPB9085	90	85	1200 x 2000	25	60.00
RG-SPB90100	90	100	1200 x 2000	22	52.80

120 kg/m³ panel plate is produced.
Plates in size of 1000 x 2000 mm are produced.
Can be produced in the density and size you need

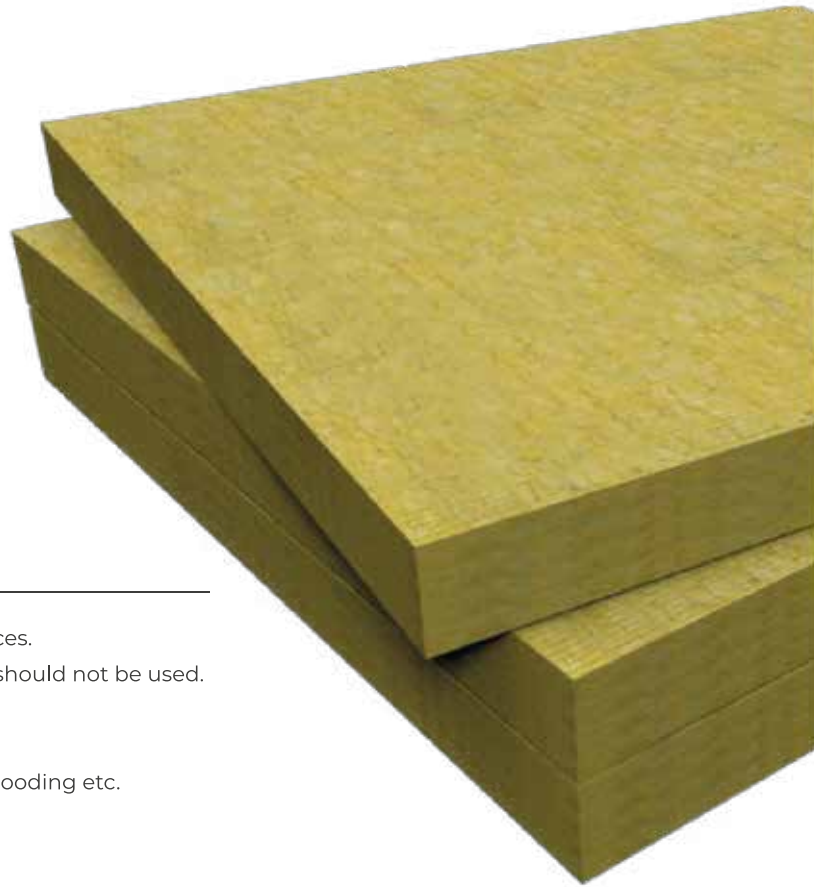

Transport and Storage, Reminders on Loading, Unloading

- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not be stepped on or used as a step.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ It should be done in closed areas in rainy weather.



"Solutions partner of insulation"

Etics Board

Product description: ETICS board, which contains complex fiber structure formed by interlocked fibers inside, creates resistance to withstand high pressure in lower densities. The structure of Hair- Braiding fiber makes the application of overcoating on the stonewool more resistant and strong. Through, the load capacity on the construction and surface increases.

Application areas


Can be coated with plaster due to tensile and compressive strength. It is used on the facades of the buildings for heat, sound and fire insulation.

Application principles


ETICS board used at outside of the buildings under the stucco for heat, sound insulation and fire protection. Boards are stuck with the cement based adhesive daub on the smooth surface. Loose particles on the building surface should be cleaned by brushing and damaged areas should be repaired with plaster. After all surfaces are ready for insulation, the plumb line of the building is controlled with the help of plumb lines and horizontal ropes, then water insulation profile is placed and the thermal insulation panels should be adhered to the surfaces with various bonding methods. Care should be given so that the adhesive cement materials should not overflow out of the joints. 24 hours later, it will be fastened; respectively corner profiles, plaster, 160 gr/m² alkaline resistant mesh, correction plaster, priming coat, mineral coating and finally priming exterior paint is applied

Transport and Storage, Reminders on Loading, Unloading

- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not be stepped on or used as a step.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ It should be done in closed areas in rainy weather.

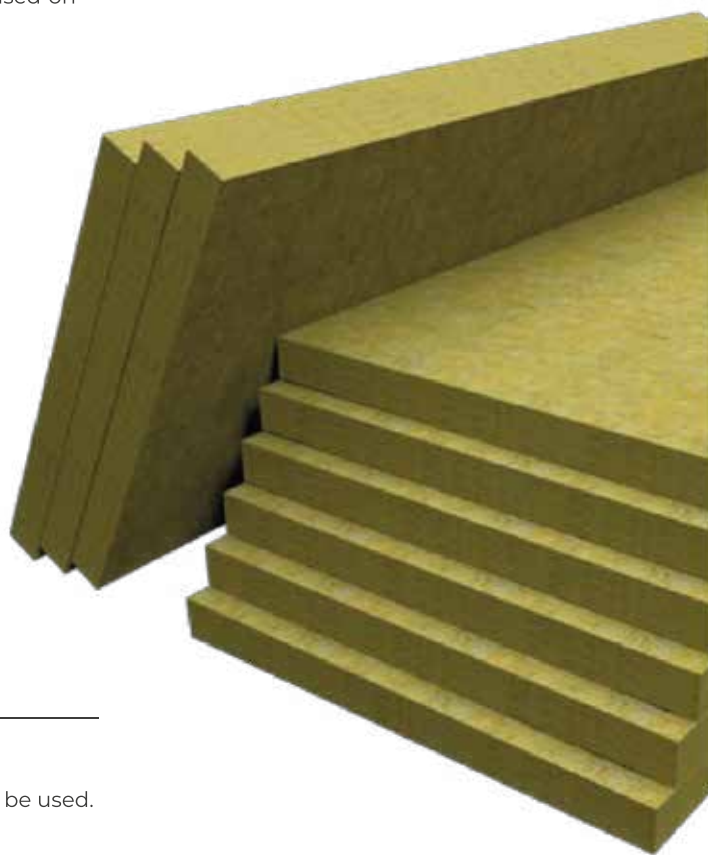

**RAM
GLOBAL**

Product Code	Density	Thickness	Size	Package		
	kg / m³	mm	mm x mm	piece	m²	
RG-EB10030	100	30	600 x 1200	8	5.76	2.833
RG-EB10040	100	40	600 x 1200	6	4.32	2.125
RG-EB10050	100	50	600 x 1200	4	2.88	1.700
RG-EB10060	100	60	600 x 1200	4	2.88	1.416
RG-EB10070	100	70	600 x 1200	3	2.16	1.214
RG-EB10080	100	80	600 x 1200	4	2.88	1.063
RG-EB100100	100	100	600 x 1200	3	2.16	850
RG-EB100120	100	120	600 x 1200	2	1.44	700
RG-EB11030	110	30	600 x 1200	8	5.76	2.833
RG-EB11040	110	40	600 x 1200	6	4.32	2.125
RG-EB11050	110	50	600 x 1200	4	2.88	1.700
RG-EB11060	110	60	600 x 1200	4	2.88	1.416
RG-EB11070	110	70	600 x 1200	3	2.16	1.214
RG-EB11080	110	80	600 x 1200	4	2.88	1.063
RG-EB110100	110	100	600 x 1200	3	2.16	850
RG-EB110120	110	120	600 x 1200	2	1.44	700
RG-EB12050	120	50	600 x 1200	4	2.88	1.700
RG-EB12060	120	60	600 x 1200	4	2.88	1.416
RG-EB12070	120	70	600 x 1200	3	2.16	1.214
RG-EB12080	120	80	600 x 1200	3	2.16	1.063
RG-EB120100	120	100	600 x 1200	3	2.16	850
RG-EB120120	120	120	600 x 1200	2	1.44	700
RG-EB120150	120	150	600 x 1200	2	1.44	567
RG-EB13050	130	50	600 x 1200	4	2.88	1.700
RG-EB13060	130	60	600 x 1200	4	2.88	1.416
RG-EB13070	130	70	600 x 1200	3	2.16	1.214
RG-EB13080	130	80	600 x 1200	3	2.16	1.063
RG-EB130100	130	100	600 x 1200	3	2.16	850
RG-EB130120	130	120	600 x 1200	2	1.44	700
RG-EB130150	130	150	600 x 1200	2	1.44	567
RG-EB15020	150	20	600 x 1200	12	8.64	4.250
RG-EB15025	150	25	600 x 1200	8	5.76	3.400
RG-EB15030	150	30	600 x 1200	8	5.76	2.833
RG-EB15040	150	40	600 x 1200	6	4.32	2.125
RG-EB15050	150	50	600 x 1200	4	2.88	1.700
RG-EB15060	150	60	600 x 1200	4	2.88	1.416
RG-EB15070	150	70	600 x 1200	3	2.16	1.214
RG-EB15080	150	80	600 x 1200	3	2.16	1.063
RG-EB150100	150	100	600 x 1200	3	2.16	850
RG-EB150120	150	120	600 x 1200	2	1.44	700

Floating Floor Panel

Product description: Floating floor panel is a bare stone wool plate produced for areas that require compressive strength and require load bearing, sound insulation, vibration and fire resistance. Floating floor panel is used for the floors of the buildings, floors between floors and under the vibration source base for the purpose of heat, sound and vibration insulation.

Application areas

It is used for the floors of the buildings, floors between floors and under the vibration source base for the purpose of heat, sound and vibration insulation.

Application principles

Plates placed on the floor are bonded to the lateral walls of the floor up to the height of the leveling concrete to prevent vibration transfer. Before the trowel coating is poured, it should be covered with a polyethylene fabric. When it is supported with wire and reinforcements (PP fiber), a layer without shrinking cracks will be obtained. Then the application is completed by covering the desired flooring material.

Product Code	Density	Thickness	Size	Package		
	kg / m ³	mm	mm x mm	piece	m ²	
RG-FFP15020	150	20	600 x 1200	12	8.64	4.250
RG-FFP15025	150	25	600 x 1200	8	5.76	3.400
RG-FFP15030	150	30	600 x 1200	8	5.76	2.833

Transport and Storage, Reminders on Loading, Unloading

- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not be stepped on or used as a step.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ It should be done in closed areas in rainy weather.



RAM
GLOBAL

Industrial Board


Product description: Industrial board is used for insulation of very high temperatures, industrial facilities, process equipment, steel construction structures, all kinds of technical details requiring heat insulation and fire safety.

Application areas

It is used for heat, sound and fire insulation in steel constructions, industrial plants, process equipment.

Application principles

Application surfaces; After the insulation is made ready for the coating by means of hanging pins or carrier hoops, the plates are installed and the sheet metal coatings are made. It is also used in ready panel applications of industrial plates.

Product Code	Density	Thickness	Size	Package		
	kg / m ³	mm	mm x mm	piece	m ²	
RG-IB7030	70	30	600 x 1200	15	10.80	2.833
RG-IB7040	70	40	600 x 1200	12	8.64	2.125
RG-IB7050	70	50	600 x 1200	8	5.76	1.700
RG-IB7060	70	60	600 x 1200	6	4.32	1.416
RG-IB7070	70	70	600 x 1200	6	4.32	1.214
RG-IB7080	70	80	600 x 1200	5	3.60	1.063
RG-IB70100	70	100	600 x 1200	4	2.88	850
RG-IB70120	70	120	600 x 1200	4	2.88	700
RG-IB10030	100	30	600 x 1200	8	5.76	2.833
RG-IB10040	100	40	600 x 1200	6	4.32	2.125
RG-IB10050	100	50	600 x 1200	4	2.88	1.700
RG-IB10060	100	60	600 x 1200	4	2.88	1.416
RG-IB10070	100	70	600 x 1200	3	2.16	1.214
RG-IB10080	100	80	600 x 1200	4	2.88	1.063
RG-IB100100	100	100	600 x 1200	3	2.16	850
RG-IB100120	100	120	600 x 1200	2	1.44	700
RG-IB11025	110	25	600 x 1200	10	7.20	3.400
RG-IB11030	110	30	600 x 1200	8	5.76	2.833
RG-IB11040	110	40	600 x 1200	6	4.32	2.125
RG-IB11050	110	50	600 x 1200	4	2.88	1.700
RG-IB11060	110	60	600 x 1200	4	2.88	1.416
RG-IB11070	110	70	600 x 1200	4	2.88	1.214
RG-IB11080	110	80	600 x 1200	4	2.88	1.063
RG-IB110100	110	100	600 x 1200	3	2.16	850
RG-IB110120	110	120	600 x 1200	2	1.44	700

Transport and Storage, Reminders on Loading, Unloading

- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not be stepped on or used as a step.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ It should be done in closed areas in rainy weather.



"Solutions partner of insulation"

Industrial Blankets

Product description: High temperature resistant, bare or aluminum foil coated stone wool blankets. It is used in all technical details requiring heat, sound and fire insulation.

Application areas

It is used in industrial facilities of high temperatures, technical equipment, air-conditioning channels, steel constructions, chimneys and heating boilers for heat, sound and fire insulation purposes.

Application principles

First, stone wool blanket is placed on supporter surfaces to be made with insulation hanger pin and hoops and used as the protector of sheet metal covering.

Product Code	Density	Thickness	Size (mm)	Number of Rolls	m ² / Package
RG-IB8080	80	80	1200 x 5000	1	6.00
RG-IB80100	80	100	1200 x 3000	1	3.60
RG-IB80120	80	120	1200 x 3000	1	3.60
RG-IB80140	80	140	1200 x 3000	1	3.60
RG-IB9080	90	80	1200 x 5000	1	6.00
RG-IB90100	90	100	1200 x 3000	1	3.60
RG-IB90120	90	120	1200 x 3000	1	3.60
RG-IB90140	90	140	1200 x 3000	1	3.60
RG-IB10080	100	80	1200 x 5000	1	6.00
RG-IB100100	100	100	1200 x 3000	1	3.60
RG-IB100120	100	120	1200 x 3000	1	3.60
RG-IB100140	100	140	1200 x 3000	1	3.60
RG-IB11080	110	80	1200 x 5000	1	6.00
RG-IB110100	110	100	1200 x 3000	1	3.60
RG-IB110120	110	120	1200 x 3000	1	3.60
RG-IB110140	110	140	1200 x 3000	1	3.60
RG-IB12080	120	80	1200 x 5000	1	6.00
RG-IB120100	120	100	1200 x 3000	1	3.60
RG-IB120120	120	120	1200 x 3000	1	3.60
RG-IB120140	120	140	1200 x 3000	1	3.60

Transport and Storage, Reminders on Loading, Unloading

- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not be stepped on or used as a step.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ It should be done in closed areas in rainy weather.



**RAM
GLOBAL**

Industrial Blanket With Wire Mesh


Product description: High temperature resistant, stitched, galvanized wire mesh coated heat and fire insulation mattress. It is used ducts and chimneys, Boilers for central heating, Industrial places. It is used for heat and fire insulation in big diameter pipes, industrial plants and process equipment

Application areas

It is used for heat and fire insulation in big diameter pipes, industrial plants and process equipment.


Application principles

It is wound on large diameter pipes and the joints are passed through the wire mesh of the galvanized wires and sewn. On large surfaces, it is applied in the form of insertion lathes. Ensures easy usage on the cylindrical elliptical and non-smooth surfaces by means of its wire mesh covering, ensures heat, sound and fire insulation in industrial equipments exposed high temperature

Product Code	Density	Thickness	Size	Package		
	kg / m ³	mm	mm x mm	piece	m ²	
RG-BWM8050	80	50	1200 x 5000	1	6.00	1.700
RG-BWM8060	80	60	1200 x 5000	1	6.00	1.416
RG-BWM8080	80	80	1200 x 3000	1	3.60	1.625
RG-BWM80100	80	100	1200 x 3000	1	3.60	1.176
RG-BWM9050	90	50	1200 x 5000	1	6.00	1.700
RG-BWM9060	90	60	1200 x 5000	1	6.00	1.416
RG-BWM9080	90	80	1200 x 3000	1	3.60	1.625
RG-BWM90100	90	100	1200 x 3000	1	3.60	1.176
RG-BWM10040	100	40	1200 x 8000	1	9.60	2.125
RG-BWM10050	100	50	1200 x 5000	1	6.00	1.700
RG-BWM10060	100	60	1200 x 5000	1	6.00	1.416
RG-BWM10080	100	80	1200 x 3000	1	3.60	1.625
RG-BWM100100	100	100	1200 x 3000	1	3.60	1.176
RG-BWM12550	125	50	1200 x 3000	1	3.60	1.700
RG-BWM12560	125	60	1200 x 3000	1	3.60	1.416
RG-BWM12580	125	80	1200 x 3000	1	3.60	1.625
RG-BWM125100	125	100	1200 x 3000	1	3.60	1.176

Transport and Storage, Reminders on Loading, Unloading

- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not be stepped on or used as a step.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ It should be done in closed areas in rainy weather.

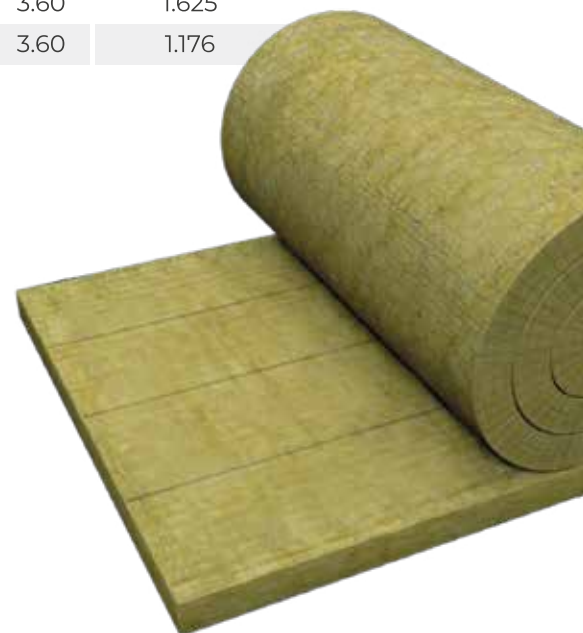

"Solutions partner of insulation"

Internal, Wall Heat Insulation Board


Product description: It is produced as high density stone wool panel with heat, sound and fire safety. Internal, wall heat insulation board is used as heat, sound and fire insulation on the inner surface of the exterior walls of buildings, on the adjacent walls of the stairways and elevator spaces, and inside the wooden carcass structures


Application areas

It is used as heat, sound and fire insulation on the inner surface of the exterior walls of buildings, on the adjacent walls of the stairways and elevator spaces, and inside the wooden carcass structures.

Application principles

Internal, wall heat insulation board is produced for the companies of plaster panel and OSB type panel. Application principles vary according to the details requested by the plaster panel manufacturers.

Product Code	Density	Thickness	Size	Package		
	kg / m ³	mm	mm x mm	piece	m ²	
RG-IW11030	110	30	600 x 1200	8	5.76	2.833
RG-IW11040	110	40	600 x 1200	6	4.32	2.125
RG-IW11050	110	50	600 x 1200	4	2.88	1.700
RG-IW12050	120	30	600 x 1200	8	5.76	2.833
RG-IW12050	120	40	600 x 1200	6	4.32	2.125
RG-IW12050	120	50	600 x 1200	4	2.88	1.700
RG-IW13050	130	30	600 x 1200	8	5.76	2.833
RG-IW13050	130	40	600 x 1200	6	4.32	2.125
RG-IW13050	130	50	600 x 1200	4	2.88	1.700
RG-IW14050	140	30	600 x 1200	8	5.76	2.833
RG-IW14050	140	40	600 x 1200	6	4.32	2.125
RG-IW14050	140	50	600 x 1200	4	2.88	1.700
RG-IW15050	150	30	600 x 1200	8	5.76	2.833
RG-IW15050	150	40	600 x 1200	6	4.32	2.125
RG-IW15050	150	50	600 x 1200	4	2.88	1.700
RG-IW16050	160	30	600 x 1200	8	5.76	2.833
RG-IW16050	160	40	600 x 1200	6	4.32	2.125
RG-IW16050	160	50	600 x 1200	4	2.88	1.700
RG-IW17050	170	30	600 x 1200	8	5.76	2.833
RG-IW17050	170	40	600 x 1200	6	4.32	2.125
RG-IW17050	170	50	600 x 1200	4	2.88	1.700

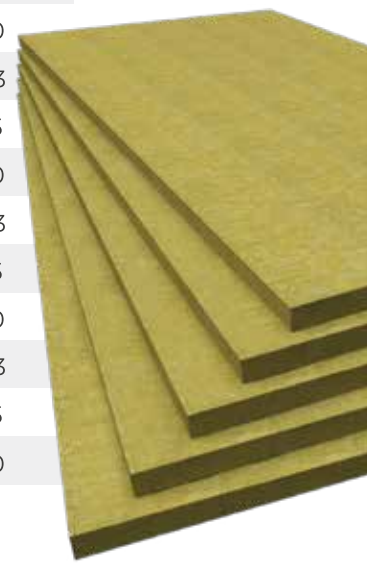

RAM
GLOBAL

Terrace Roof Board


Product description: Roof bare stone wool board produced with high compression strength for terrace roofs and walkways and for metal and wooden roofs of various slopes. Used at terrace roofs for the purpose of heat, sound and damp insulation.

Application areas and principles

It is used All metal and wooden roofs and all kinds of terraces After the surface finish is made on the terraces and terrace roofs, the joints of the vapor barrier material will be glued by overlapping 10 cm. Then, the stone wool terrace plate will be laid on the surface and the polyethylene sheet will be laid on top. Slope concrete with trowel coating will be poured. After the corner bevels are completed, the waterproofing process will be blocked by overlapping the joints with the bitumen sheeting such as PVC, TPO or EPDM membranes and turning them into the parapets by gluing and sealing. After the water intake test, geotextile felt will be laid and protection and coating layers will be made. On top of the trapezoid metal roof, a layer of vapor barrier polyethylene will be placed by overlapping joints by 10 cm. Single or double layer of stone wool plates will be fixed with trapezoidal screws. In cases where it is applied in 2 layers, stone wool is applied vertically and horizontally. As waterproofing layer, PVC, TPO or EPDM membranes is applied

Transport and Storage, Reminders on Loading, Unloading

- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not be stepped on or used as a step.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ It should be done in closed areas in rainy weather.

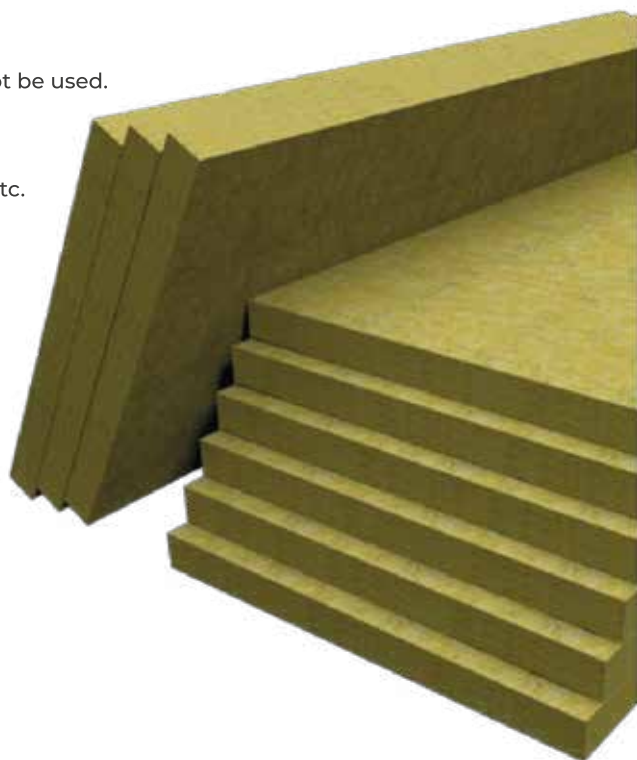


RAM
GLOBAL

hundred
per
cent
100%
DOMESTIC
CAPITAL


"Solutions partner of insulation"

Terrace Roof Board (600x1200)

Product Code	Density	Thickness	Size	Package		
	kg / m³	mm	mm x mm	piece	m²	
RG-TRB10030	100	30	600 X 1200	8	5.76	2.833
RG-TRB10040	100	40	600 X 1200	6	4.32	2.125
RG-TRB10050	100	50	600 X 1200	4	2.88	1.700
RG-TRB10060	100	60	600 X 1200	4	2.88	1.416
RG-TRB10070	100	70	600 X 1200	3	2.16	1.214
RG-TRB10080	100	80	600 X 1200	3	2.16	1.063
RG-TRB100100	100	100	600 X 1200	3	2.16	850
RG-TRB100120	100	120	600 X 1200	2	1.44	700
RG-TRB11030	110	30	600 X 1200	8	5.76	2.833
RG-TRB11040	110	40	600 X 1200	6	4.32	2.125
RG-TRB11050	110	50	600 X 1200	4	2.88	1.700
RG-TRB11060	110	60	600 X 1200	4	2.88	1.416
RG-TRB11070	110	70	600 X 1200	3	2.16	1.214
RG-TRB11080	110	80	600 X 1200	3	2.16	1.063
RG-TRB110100	110	100	600 X 1200	3	2.16	850
RG-TRB110120	110	120	600 X 1200	2	1.44	700
RG-TRB12030	120	30	600 X 1200	8	5.76	2.833
RG-TRB12040	120	40	600 X 1200	6	4.32	2.125
RG-TRB12050	120	50	600 X 1200	4	2.88	1.700
RG-TRB12060	120	60	600 X 1200	4	2.88	1.416
RG-TRB12070	120	70	600 X 1200	3	2.16	1.214
RG-TRB12080	120	80	600 X 1200	3	2.16	1.063
RG-TRB120100	120	100	600 X 1200	3	2.16	850
RG-TRB120120	120	120	600 X 1200	2	1.44	700
RG-TRB13030	130	30	600 X 1200	8	5.76	2.833
RG-TRB13040	130	40	600 X 1200	6	4.32	2.125
RG-TRB13050	130	50	600 X 1200	4	2.88	1.700
RG-TRB13060	130	60	600 X 1200	4	2.88	1.416
RG-TRB13070	130	70	600 X 1200	3	2.16	1.214
RG-TRB13080	130	80	600 X 1200	3	2.16	1.063
RG-TRB130100	130	100	600 X 1200	3	2.16	850
RG-TRB130120	130	120	600 X 1200	2	1.44	700
RG-TRB14030	140	30	600 X 1200	8	5.76	2.833
RG-TRB14040	140	40	600 X 1200	6	4.32	2.125
RG-TRB14050	140	50	600 X 1200	4	2.88	1.700
RG-TRB14060	140	60	600 X 1200	4	2.88	1.416
RG-TRB14070	140	70	600 X 1200	3	2.16	1.214
RG-TRB14080	140	80	600 X 1200	3	2.16	1.063
RG-TRB140100	140	100	600 X 1200	3	2.16	850
RG-TRB140120	140	120	600 X 1200	2	1.44	700
RG-TRB15030	150	30	600 X 1200	8	5.76	2.833
RG-TRB15040	150	40	600 X 1200	6	4.32	2.125
RG-TRB15050	150	50	600 X 1200	4	2.88	1.700
RG-TRB15060	150	60	600 X 1200	4	2.88	1.416
RG-TRB15070	150	70	600 X 1200	3	2.16	1.214
RG-TRB15080	150	80	600 X 1200	3	2.16	1.063
RG-TRB150100	150	100	600 X 1200	3	2.16	850
RG-TRB150120	150	120	600 X 1200	2	1.44	700

RAM
GLOBAL

Terrace Roof Board (1200x2000)

Product Code	Density	Thickness	Size	Package		
	kg / m³	mm	mm x mm	piece	m²	
RG-RB10030	100	30	1200 x 2000	83	199.20	2.589,60
RG-RB10040	100	40	1200 x 2000	62	148.80	1.934,40
RG-RB10050	100	50	1200 x 2000	50	120.00	1.560,00
RG-RB10060	100	60	1200 x 2000	41	98.40	1.279,20
RG-RB10070	100	70	1200 x 2000	35	84.00	1.092,00
RG-RB10080	100	80	1200 x 2000	31	74.40	967,20
RG-RB100100	100	100	1200 x 2000	25	60.00	780,00
RG-RB100120	100	120	1200 x 2000	20	48.00	624,00
RG-RB11030	110	30	1200 x 2000	83	199.20	2.589,60
RG-RB11040	110	40	1200 x 2000	62	148.80	1.934,40
RG-RB11050	110	50	1200 x 2000	50	120.00	1.560,00
RG-RB11060	110	60	1200 x 2000	41	98.40	1.279,20
RG-RB11070	110	70	1200 x 2000	35	84.00	1.092,00
RG-RB11080	110	80	1200 x 2000	31	74.40	967,20
RG-RB110100	110	100	1200 x 2000	25	60.00	780,00
RG-RB110120	110	120	1200 x 2000	20	48.00	624,00
RG-RB12030	120	30	1200 x 2000	83	199.20	2.589,60
RG-RB12040	120	40	1200 x 2000	62	148.80	1.934,40
RG-RB12050	120	50	1200 x 2000	50	120.00	1.560,00
RG-RB12060	120	60	1200 x 2000	41	98.40	1.279,20
RG-RB12070	120	70	1200 x 2000	35	84.00	1.092,00
RG-RB12080	120	80	1200 x 2000	31	74.40	967,20
RG-RB120100	120	100	1200 x 2000	25	60.00	780,00
RG-RB120120	120	120	1200 x 2000	20	48.00	624,00
RG-RB13030	130	30	1200 x 2000	83	199.20	2.589,60
RG-RB13040	130	40	1200 x 2000	62	148.80	1.934,40
RG-RB13050	130	50	1200 x 2000	50	120.00	1.560,00
RG-RB13060	130	60	1200 x 2000	41	98.40	1.279,20
RG-RB13070	130	70	1200 x 2000	35	84.00	1.092,00
RG-RB13080	130	80	1200 x 2000	31	74.40	967,20
RG-RB130100	130	100	1200 x 2000	25	60.00	780,00
RG-RB130120	130	120	1200 x 2000	20	48.00	624,00
RG-RB14030	140	30	1200 x 2000	83	199.20	2.589,60
RG-RB14040	140	40	1200 x 2000	62	148.80	1.934,40
RG-RB14050	140	50	1200 x 2000	50	120.00	1.560,00
RG-RB14060	140	60	1200 x 2000	41	98.40	1.279,20
RG-RB14070	140	70	1200 x 2000	35	84.00	1.092,00
RG-RB14080	140	80	1200 x 2000	31	74.40	967,20
RG-RB140100	140	100	1200 x 2000	25	60.00	780,00
RG-RB140120	140	120	1200 x 2000	20	48.00	624,00
RG-RB15030	150	30	1200 x 2000	83	199.20	2.589,60
RG-RB15040	150	40	1200 x 2000	62	148.80	1.934,40
RG-RB15050	150	50	1200 x 2000	50	120.00	1.560,00
RG-RB15060	150	60	1200 x 2000	41	98.40	1.279,20
RG-RB15070	150	70	1200 x 2000	35	84.00	1.092,00
RG-RB15080	150	80	1200 x 2000	31	74.40	967,20
RG-RB150100	150	100	1200 x 2000	25	60.00	780,00
RG-RB150120	150	120	1200 x 2000	20	48.00	624,00

Fire Door Board

Product description: It is produced as a stone wool plate that provides fire resistance (E160) for fire door manufacturing. It is used fire safety doors, Inside parts of the doors of cold air warehouses, Inside of door and side parts of steel doors and doors of the industrial ovens


Application principles

As it is intended for the companies producing fire doors, it is applied in one piece depending on the details of the manufacturer. At door production, stonewool boards are mounted to the inner body between two surfaces and side parts by pressing or pins. It ensures thermal, sound and fire insulation at the door regions

Product Code	Density	Thickness	Size (mm)	In-Pack Pieces	m ² / Package
RG-FDB15060	150	60	950 x 2100	32	63.84

Transport and Storage, Reminders on Loading, Unloading

- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not be stepped on or used as a step.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ It should be done in closed areas in rainy weather.

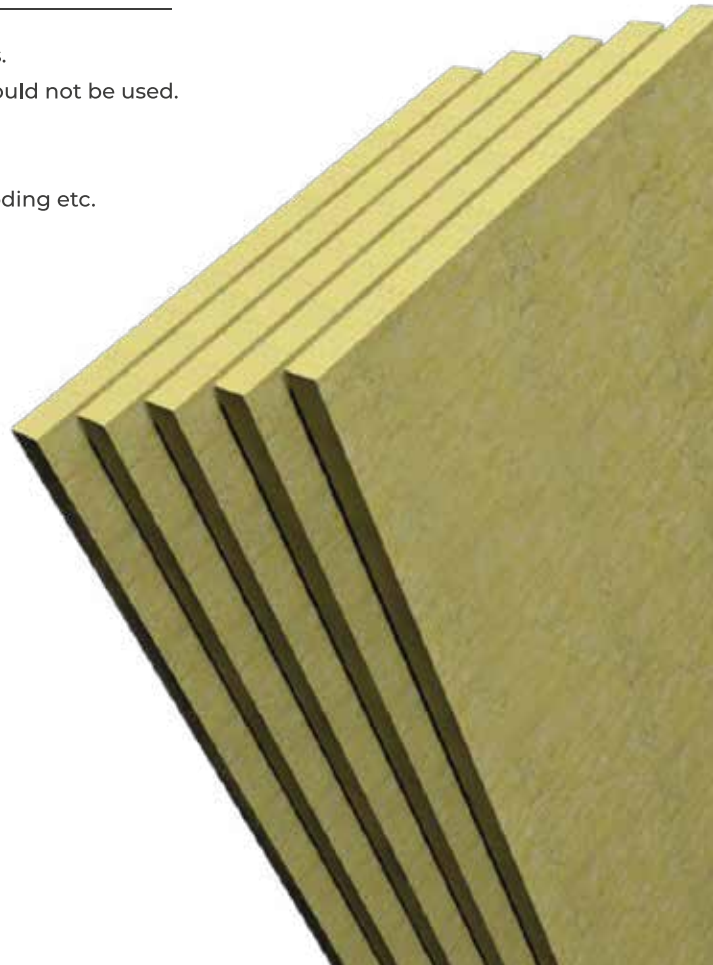

RAM
GLOBAL

Ship Plates

Product description: It is a self-standing, high temperature resistant, bare stone wool plate.

Application areas

It is used for ship and marine construction areas, cofferdam walls, fire doors, fire compartments and interior installations of the vessels.

Application principles

Fixing pins are fastened to the application surfaces by means of spacers and metal elements.

Product Code	Density	Thickness	Size (mm)	In-Pack Pieces	m ² / Package
RG-SP4530	45	30	600 x 1200	15	10.80
RG-SP4540	45	40	600 x 1200	10	7.20
RG-SP4550	45	50	600 x 1200	8	5.76
RG-SP4560	45	60	600 x 1200	7	5.04
RG-SP11030	110	30	600 x 1200	10	7.20
RG-SP11040	110	40	600 x 1200	6	4.32
RG-SP11050	110	50	600 x 1200	5	3.60
RG-SP11060	110	60	600 x 1200	4	2.88
RG-SP14030	140	30	600 x 1200	8	5.76
RG-SP15030	150	30	600 x 1200	8	5.76
RG-SP15040	150	40	600 x 1200	6	4.32
RG-SP15050	150	50	600 x 1200	5	3.60
RG-SP15060	150	60	600 x 1200	5	3.60

Transport and Storage, Reminders on Loading, Unloading

- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not be stepped on or used as a step.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ It should be done in closed areas in rainy weather.



"Solutions partner of insulation"

Ship Blankets

Product description: Ship blanket is a self-standing, high temperature resistant, bare stone wool board.

Application areas

It is used for ship and marine construction areas, cofferdam walls, fire doors, fire compartments and interior installations of the vessels.

Application principles

Ship blankets is used for ship and marine construction areas, cofferdam walls, fire doors, fire compartments and interior installations of the vessels. Fixing pins are fastened to the application surfaces by means of spacers and metal elements.

Product Code	Density	Thickness	Size (mm)	Number of Rolls	m ² / Package
RG-SB3250	32	50	1200 x 5000	1	6.00
RG-SB3260	32	60	1200 x 5000	1	6.00
RG-SB3270	32	80	1200 x 3000	1	3.60
RG-SB32100	32	100	1200 x 3000	1	3.60

Transport and Storage, Reminders on Loading, Unloading

- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not be stepped on or used as a step.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ It should be done in closed areas in rainy weather.



**RAM
GLOBAL**

Loose Stonewool

Product description: Loose stonewool is a stonewool fiber material that is produced without using binders and resistant to high temperatures, not having a certain form and it is used in the areas where the plate or blanket is not used.

Application areas

It is used in uneven surfaces requiring high temperature resistance, double-walled doors, laboratory devices and electrical home appliances, building components, power cable and installation passages.

Application principles

Loose stonewool should be applied to the areas without leaving any spaces. The average density of the insulation 40 kg/m³.

Transport and Storage, Reminders on Loading, Unloading

- ▶ We are packing with plastic bag and every bag is approximately 20 kg.
- ▶ Stretch the canvas even when they are shipped for short distances.
- ▶ It should be stored in the package and the damaged package should not be used.
- ▶ Packages should not be stacked on top of each other.
- ▶ The products are not to be stepped on or used as a step.
- ▶ Storage area should be closed to prevent leakage during rain, flooding etc.
- ▶ The storage floor must be flat and non-slippery.
- ▶ It should be done in closed areas in rainy weather.

RAM
GLOBAL

100%
DOMESTIC
CAPITAL

"Solutions partner of insulation"

Our Certificates





RAM
GLOBAL

100%
DOMESTIC
CAPITAL

"Solutions partner of insulation"



Heat Insulation and
Energy Efficiency



Sound Insulation and
Comfort



Fire Insulation and
Safety



Water Vapor
Permeability

AUTHORIZED DISTRIBUTOR

RAM
GLOBAL

+90 532 561 88 18 ram@ramglobal.com.tr
f t i n y ramglobaltr www.ramglobal.com.tr

Ram Yalıtım İthalat İhracat LTD. ŞTİ.

+90 532 561 88 18 +90 352 333 0 726

Kayseri / TURKEY