

COKYASAR



PRODUCT
CATALOG

**infinite
possibilities**



cokysarholding.com.tr



THE LEADING STEEL WIRE MANUFACTURER IN TÜRKİYE

4 Wire Production Facilities with Modern,
State-Of-The-Art Technology,
Annual Production Capacity of 280.000 Tons

COKYASAR

Our companies that operate in the sector of steel wire and aluminum have been united at a single source under the roof of Çokyaşar Holding as part of a Corporate Transformation Project.

The companies of Çokyaşar Holding that has 4 production facilities, 3 of which are in Türkiye and 1 in Albania, have a total annual production of 280,000 tons.

At the same time, the holding serves Türkiye in the best way possible by employing 1,000 people and creating employment opportunities for 1,000 people.

**infinite
possibilities**

ÇOKYAŞAR

ÇOKYAŞAR HOLDING, formed by our group of companies operating in steel wire, steel rope and industrial products sectors, realize an annual production of over 280.000 tons with a turnover of approximately 270M USD.

Founded by our honorary president Ahmet Çokyaşar in 1973, ÇOKYAŞAR HOLDING is an industrial company that currently serves many sectors, such as energy, infrastructure, cable, automotive, construction, agriculture and perimeter security systems. Our value added product range includes wires and wire products, particularly hot dip galvanized wires. Our headquarters is located in Istanbul; and production facilities are in Istanbul, Adana, Duzce and Elbasan/Albania.

As the leading company in its own sector, ÇOKYAŞAR HOLDING has more than 280 thousand tons of annual production capacity with approximately, 1000 employees and 4 giant production facilities. We are proud to be in the first 500 exporters and industrial enterprises of Türkiye. ÇOKYAŞAR HOLDING is exporting to 80 countries across the world, especially to Europe, Middle East, South and North America.

With more than 50 years of experience and expertise in trade and manufacturing of industrial products, ÇOKYAŞAR HOLDING takes pride in adding value to its customers as well as to Turkish economy, and carrying out responsible business conduct.

ÇOKYAŞAR HOLDING has proven its devotion to its customers, quality standards, employees and environment through, 18001, ISO 9001, ISO 14001, ISO 27001, TSE EN 10244-2, TSE EN 10223-6, and TSE EN 10223-7 certifications.


INDEX

7 ENERGY

29 PERIMETER PROTECTION AND SECURITY SYSTEMS

39 AGRICULTURE


43 CERTIFICATES

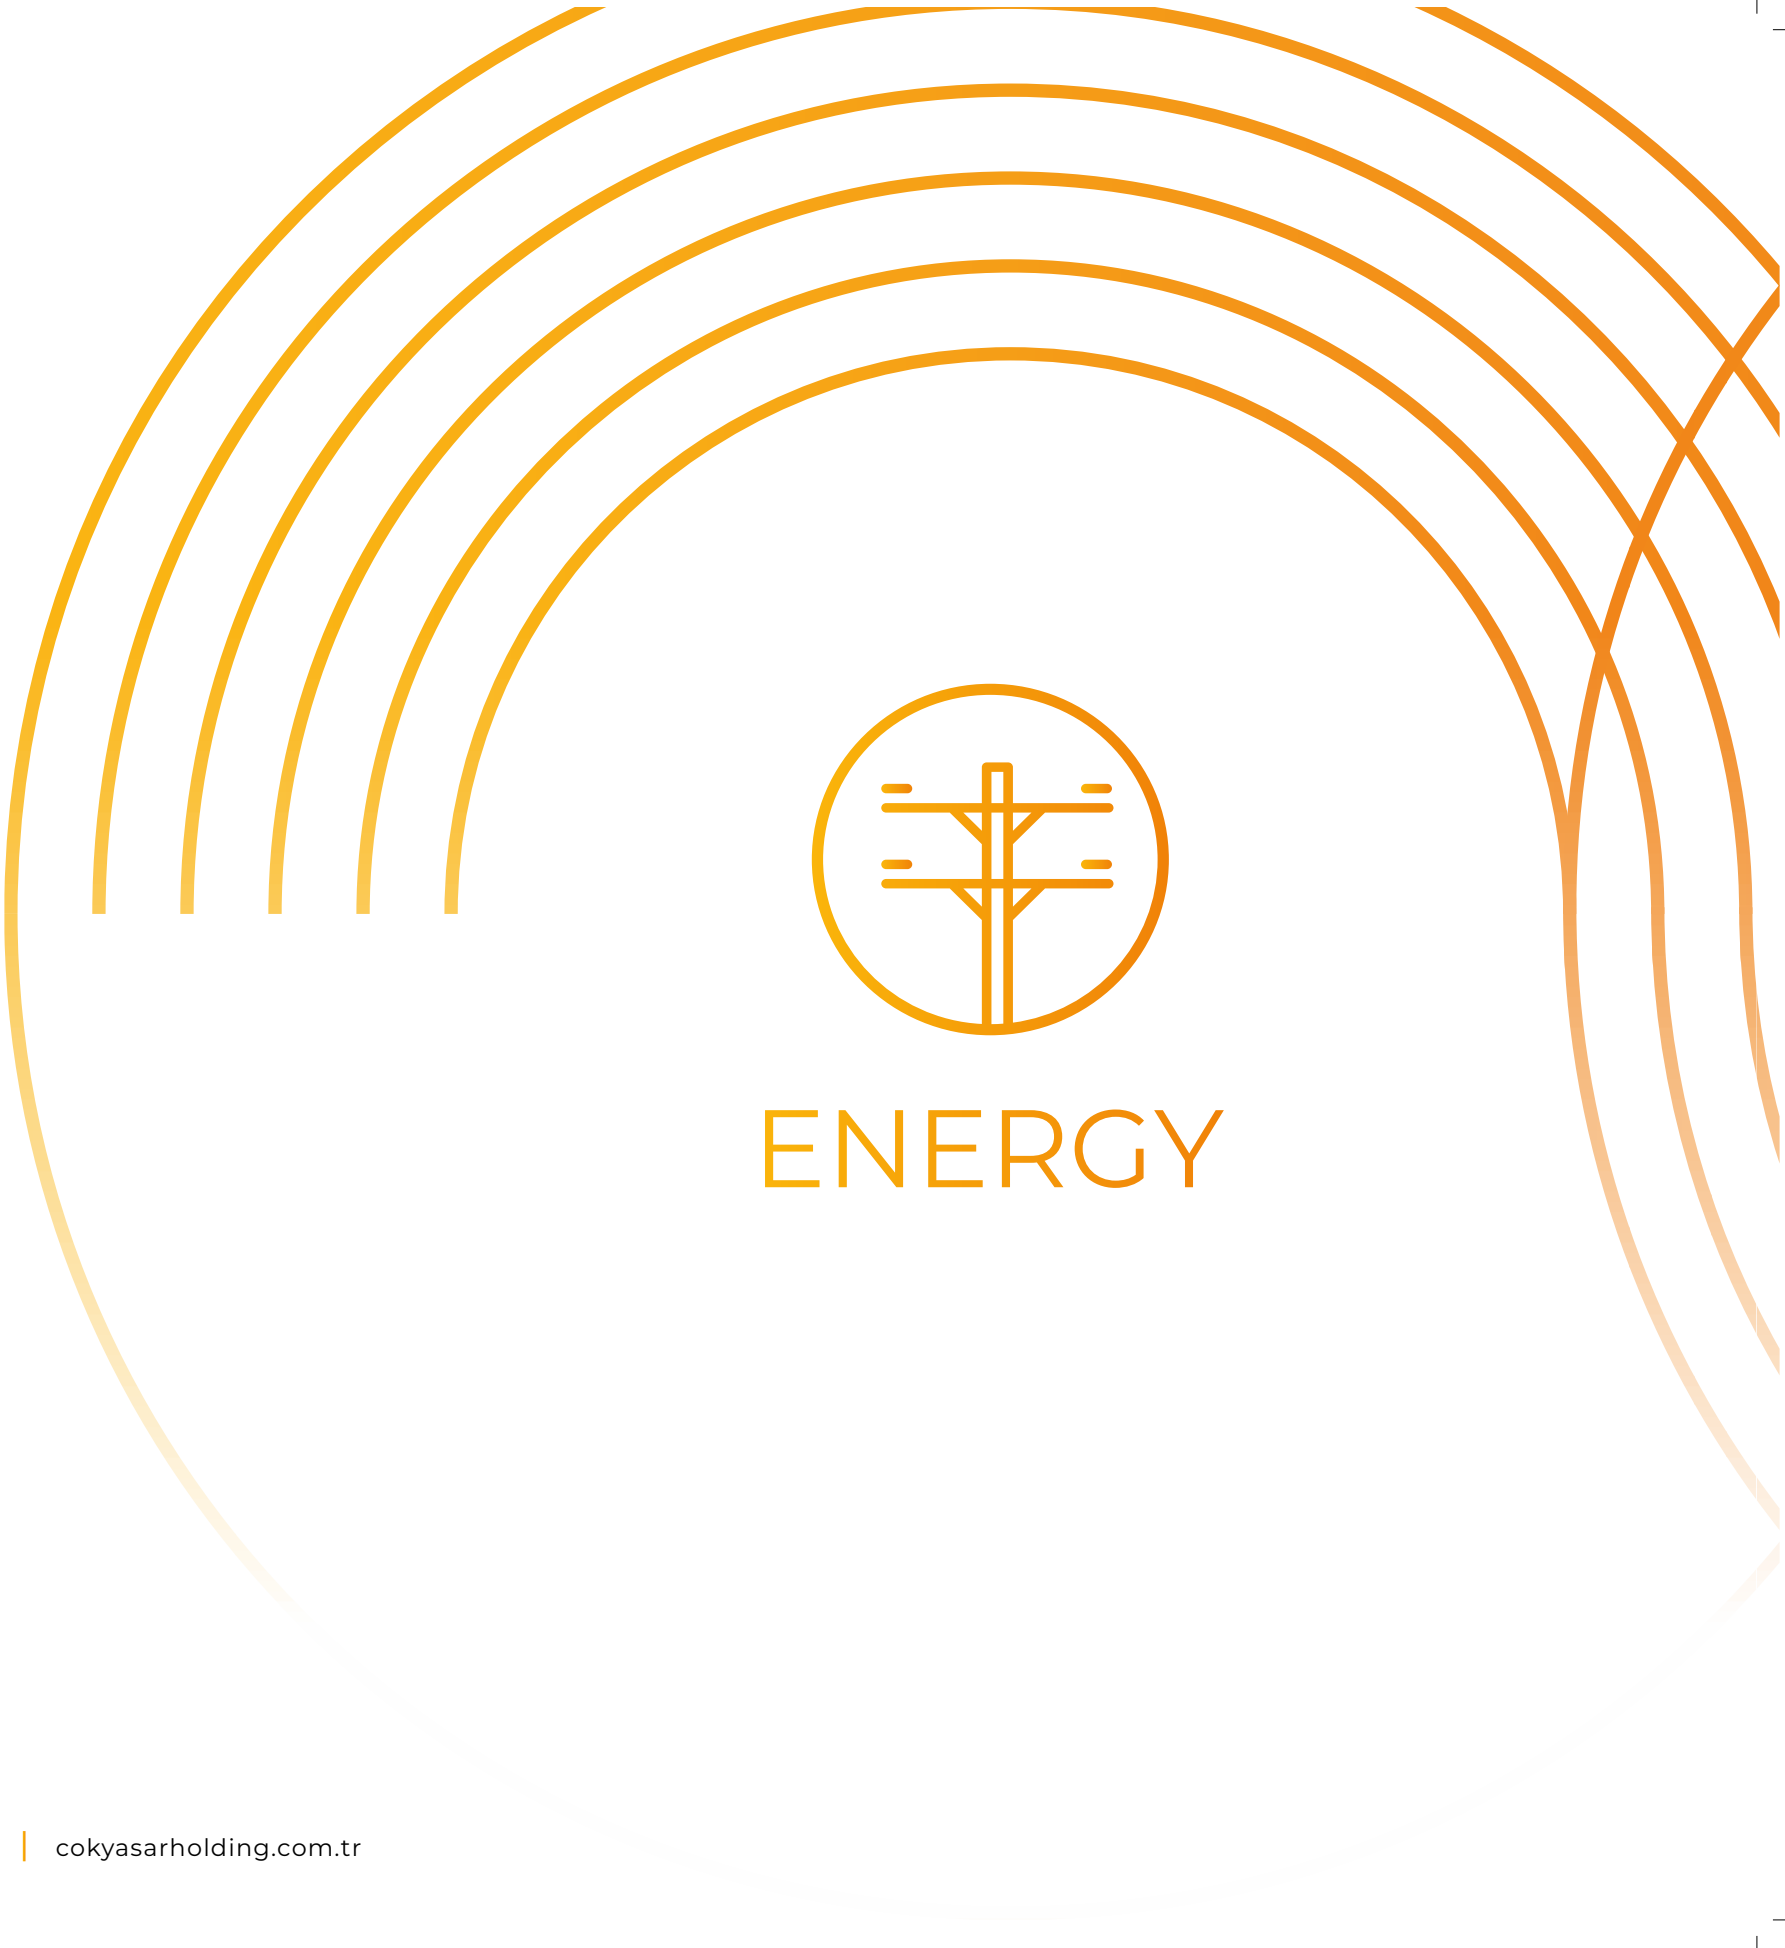

ENERGY



Standard Galvanized Wire




Technical Specifications



Material	Low-carbon steel wire
Coating	Hot-dip galvanized (Zn)
Wire Diameter	0,70 - 10,00 mm
Coating Thickness	40-400 g/m ²
Tensile Strength	350-500 N/mm ² , 500-700 N/mm ² , 700-900 N/mm ² , 800-1.000 N/mm ²
Coil Weight	100-1200 kg
Packaging	Rosette coil
Areas of Use	Production of wire netting, barbed wires, security panels, PVC coated wires, wire meshes, cages, bucket handles and nails

Armouring Wire




Technical Specifications



Material	Low-carbon steel wire
Coating	Hot-dip galvanized (Zn)
Wire Diameter	0,80 - 8,00 mm
Coating Thickness	40-400 g/m ²
Tensile Strength	340-500 MPa
Coil Weight	100-1200 kg
Packaging	Rosette coil, metal-profile basket, iron/wooden coil D=630 mm and D=800 mm), Z2- Z3 coil
Areas of Use	Power cable, Subsea cables, Umbilicals
Standards	BS 5467/EN10257-2/10244-2

Cut Length Wire



Ribbed Cut Length Wire This product, which is manufactured through straightening of cold drawn wire and cutting of the straightened wire in various lengths for th construction sector, is used as reinforcement material within concrete pillars.

Properties Ribbed cut lenght ensure for time and funds to be saved by means of their easy transport and application.



Range of Diameters : 4 mm - 5 mm - 6 mm
Size : 1000 mm - 6000 mm
Pallet : 1000 kg - 3000 kg

Galvanized Cut Length Wire It is manufactured through straightening of galvanized wire and cutting of the straightened wire in various lenghts.

Areas of Use This product is used in production of wire fencing and meshes in the construction industry, manufacturing of grills, shelves and baskets in the major appliances industry and providing frames for greenhouse covers in the agriculture industry.



Range of Diameters : 2,00 mm - 10,00 mm
Size : 500 mm - 6000 mm
Tensile Strenght : 350 - 900 N/mm²
Pallet : 250 kg - 3000 kg

Annealed Cut Length Wire It is manufactured through straightening of cold drawn wire and cutting of the straightened wire in various lenghts after they are annealed. The product is used in the process of dipping materials in zinc pools at facilities where galvanization is performed through dipping.


Areas of Use This product is used in production of wire fencing and meshes in the construction industry, manufacturing of grills, shelves and baskets in the major appliances industry and providing frames for greenhouse covers in the agriculture industry.



Range of Diameters : 2,00 mm - 7,00 mm
Size : 1000 mm - 6000 mm
Tensile Strenght : 350 - 480 N/mm²
Pallet : 1000 kg - 3000 kg



Patented Galvanized Wire




Technical Specifications



Material	High-carbon steel wire
Coating	Hot-dip galvanized (Zn)
Wire Diameter	1,40 - 6,50 mm
Coating Thickness	180-350 g/m ²
Tensile Strength	850-2050 N/mm ²
Coil Weight	750-1250 kg
Packaging	Rosette coil, Z2 coil
Areas of Use	Production of steel ropes and cord wires


Phosphated Wire



Technical Specifications

Material	High-carbon steel wire
Coating	Phosphate
Wire Diameter	1,40-4,50 mm // 0,90-2,50 mm
Coating Thickness	5-7,5 g/m ²
Tensile Strength	700-1300 n/mm ²
Coil Weight	500-1100 kg
Packaging	Rosette coil, Z2 coil
Areas of Use	Steel wire rope

ACSR Wire




Technical Specifications



Material	High-carbon steel wire
Coating	Hot-dip galvanized (Zn)
Wire Diameter	1,24-5,50 mm
Coating Thickness	180-320 g/m ²
Tensile Strength	1100-1800 n/mm ²
Coil Weight	375-1100 kg
Packaging	Rosette coil, Z2-Z3 coil, wooden spool (D=630 mm and D=800 mm)
Areas of Use	Overhead line conductors
Standards	EN 50189-ASTM B498


Cold Drawn Steel Wire



Technical Specifications

Material	High/low-carbon steel wire
Coating	N/A
Wire Diameter	0,75 mm-10,00 mm
Coating Thickness	N/A
Tensile Strength	500-1900 N/mm ²
Coil Weight	750-2000 kg
Packaging	Rosette coils, small coils, Z2-Z3 spool, wooden spool
Areas of Use	Production of nails, staples and meshes

PVC Coated Wire




Technical Specifications



Material	Low-carbon PVC coated wire
Coating	Hot-dip galvanized
Wire Diameter	2,70-4,75 mm
Coating Thickness	40-350 g/m ²
Tensile Strength	350-520 N/mm ²
Coil Weight	100-700 kg
Packaging	Rosette coil
Areas of Use	Production of fences

Black Annealed Wire



Technical Specifications

Material	Annealed wire
Coating	N/A
Wire Diameter	0,90 mm-8,00 mm
Coating Thickness	N/A
Tensile Strength	Max. 450 N/mm
Coil Weight	10-2000 kg
Packaging	Rosette coils, bundles
Areas of Use	The construction industry

Oiled Bailing Wire



Technical Specifications



Material	Oiled bailing wire
Coating	N/A
Wire Diameter	Between 1,70 and 4,00 mm
Tensile Strength	Max. 450 N/mm
Coil Weight	Max. 48 kg
Packaging	In small coils
Areas of Use	The agriculture, recycling and packaging/cardboard industries

Spring Wire


Technical Specifications



Diameter Tolerance	Ovality		TS (N/mm ²)	BL (N)	Twist / Tortion (cycle)	Packaging Properties	Carbon(%)
	Min.-Max.	Max.					
1.30 (C45)	+/- 0,02	15	1620 - 1715 - 1810	2149 - 2401	33	KGB - 600 - 800 KG	0.45%
1.40 (C45)	+/- 0,02	15	1620 - 1715 - 1810	2492 - 2785	33	KGB	0.65%
1.50 (C65)	+/- 0,02	15	1800 - 1900 - 2000	3180 - 3530	32	KGB	0.65%
1.60 (C70)	+/- 0,02	15	1800 - 1900 - 2000	3620 - 4020	32	KGB	0.65%
1.70 (C65)	+/- 0,02	15	1800 - 1900 - 2000	4090 - 4540	32	KGB	0.65%
1.80 (C65)	+/- 0,02	15	1800 - 1900 - 2000	4580 - 5090	32	KGB	0.65%
1.90 (C65)	+/- 0,02	15	1750 - 1850 - 1950	4950 - 5530	32	KGB	0.65%
2.00 (C65)	+/- 0,02	15	1700 - 1775 - 1850	5338 - 5809	29	KGB	0.65%
2.20 (C65)	+/- 0,02	15	1620 - 1700 - 1750	6155 - 6649	28	KGB	0.65%
2.32 (C65)	+/- 0,02	15	1430 - 1515 - 1600	6042 - 6760	28	KGB	0.65%
2.38 (C65)	+/- 0,02	15	1550 - 1625 - 1700	6892 - 7559	28	KGB	0.65%
2.50 (C65)	+/- 0,02	15	1500 - 1600 - 1700	7300 - 8350	---	KGB	0.65%
3.50 (C70)	+/- 0,02	15	1370 - 1500 - 1600	13175 - 15386	---	COIL - 250 KG	0.70%
4.00 (C70)	+/- 0,02	15	1280 - 1380 - 1480	16077 - 18766	---	COIL	0.70%

Standard: EN10270



K = 255
L = 117
M = 167
N = 153
O = 16 & 33
Q = 43
P = 3X13

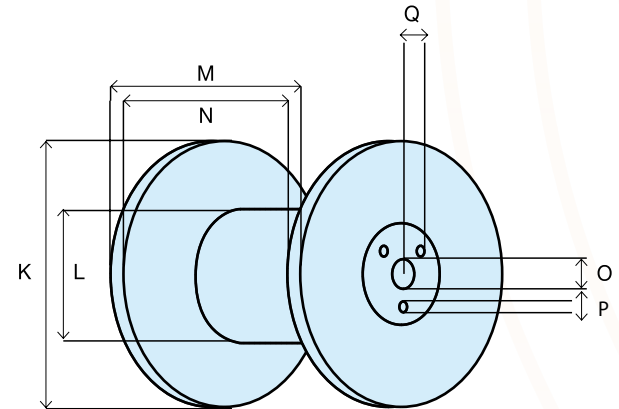

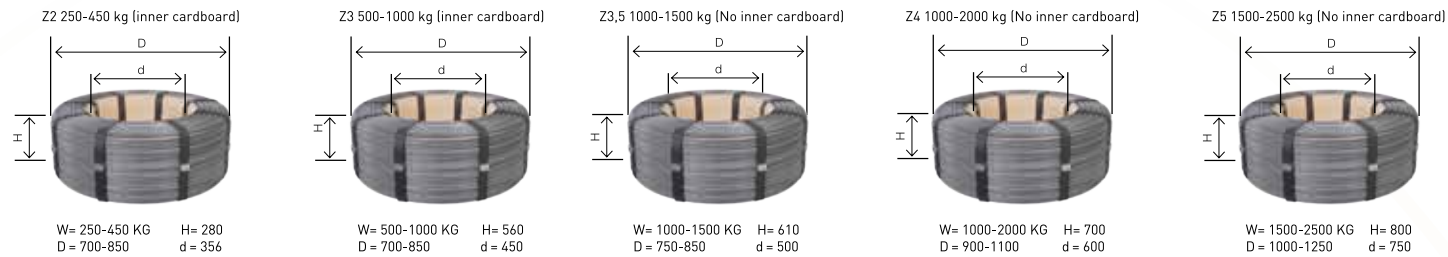

Production Technique	Steel wires which are cold-rolled with the dry or wet drawing techniques can be manufactured at any standard, galvanized, phosphated or patented.		
Use	The product is used by manufacturers of industrial springs, control cables and bed springs.		
Class	Low Tensile Strength	Medium Tensile Strength	High Tensile Strength
Range of Wire Diameters	0,40 mm - 14,00 mm	0,40 mm - 14,00 mm	0,40 mm - 12,00 mm
Tensile Strength	EN 10270-1		
Packaging	Coil, Z2 and Z3 with cardboard cores	250 - 450 kg Z2	


*Depending on customer requests, wires can be manufactured in galvanized form or at any desired tensile strength range.

infinite possibilities


Production Technique	In the production, which is carried out through the cold drawing method, chemicals that are highly resistant to moisture and corrosion are used.		
Use	The product is used by bed and seating group manufacturers.		
Class	Low Tensile Strength	Medium Tensile Strength	High Tensile Strength
	SL	SM	SH
Range of Wire Diameters	0,40 mm - 14,00 mm	0,40 mm - 14,00 mm	0,40 mm - 13,00 mm
Tensile Strength	1060 - 1970 N/mm ²	1130 - 2550 N/mm ²	1540 - 2830 N/mm ²
Packaging	Metal Spools, Z4 and Z5 Cardboard		

*Depending on customer requests, wires can be manufactured in galvanized form or at a different tensile strength range.


Spring Wire

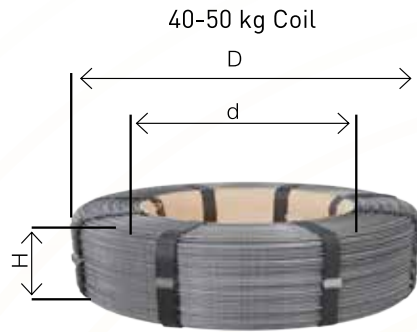


h= 130-140 D= 490 d= 350

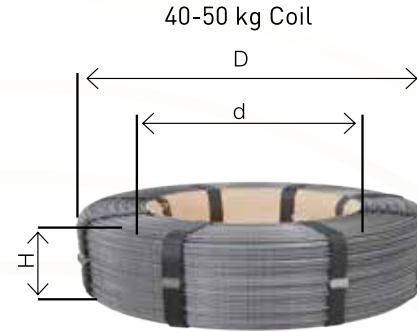


h= 130-140 D= 490 d= 350

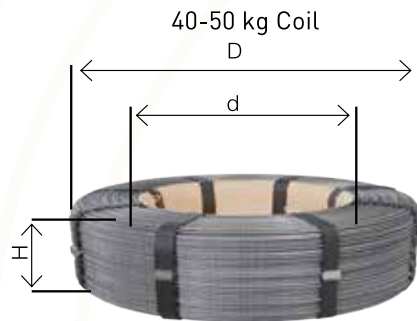


h= 130-140 D= 490 d= 350

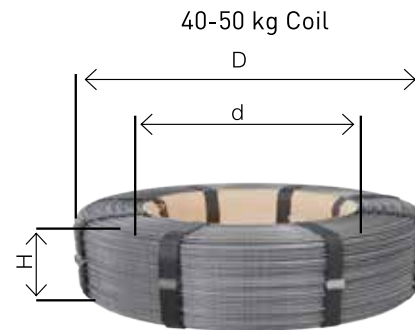

h= 130-140 D= 490 d= 350

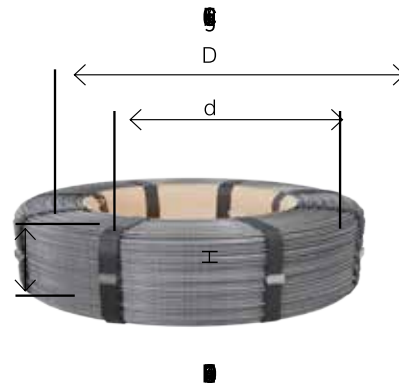



Dia (mm)	Quality (10270 - 1)			Type	Packing Type and Weights				
0.40	SL	SM			BS60				
0.50	SL	SM		Phosphated	BS60				
0.60	SL	SM		Phosphated	BS60				
0.70	SL	SM	SH	Phosphated	40 - 50 coil	250 - 350 kg Z2			
0.80	SL	SM	SH	Phosphated	40 - 50 coil	250 - 350 kg Z2			
0.90	SL	SM	SH	Phosphated	40 - 50 coil	250 - 450 kg Z2			
1.00	SL	SM	SH	Phosphated	40 - 50 coil	250 - 450 kg Z2			
1.10	SL	SM	SH	Phosphated	40 - 50 coil	250 - 450 kg Z2			
1.20	SL	SM	SH	Phosphated	40 - 50 coil	250 - 450 kg Z2			
1.30	SL	SM	SH	Phosphated	40 - 50 coil	250 - 450 kg Z2			
1.40	SL	SM	SH	Phosphated	60 - 100 coil	250 - 450 kg Z2			
1.50	SL	SM	SH	Phosphated	60 - 100 coil	250 - 450 kg Z2			
1.60	SL	SM	SH	Phosphated	60 - 100 coil	250 - 450 kg Z2			
1.70	SL	SM	SH	Phosphated	60 - 100 coil	250 - 450 kg Z2	500 - 1000 kg Z3		
1.80	SL	SM	SH	Phosphated	60 - 100 coil	250 - 450 kg Z2	500 - 1000 kg Z3		
1.90	SL	SM	SH	Phosphated	60 - 100 coil	250 - 450 kg Z2	500 - 1000 kg Z3		
2.00	SL	SM	SH	Phosphated	60 - 100 coil	250 - 450 kg Z2	500 - 1000 kg Z3		
2.20	SL	SM	SH	Phosphated	100 - 150 coil	250 - 450 kg Z2	500 - 1000 kg Z3		
2.50	SL	SM	SH	Phosphated	100 - 150 coil	250 - 450 kg Z2	500 - 1000 kg Z3		
2.80	SL	SM	SH	Phosphated	100 - 150 coil	250 - 450 kg Z2	500 - 1000 kg Z3		
3.00	SL	SM	SH	Phosphated	150 - 250 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5		
3.20	SL	SM	SH	Phosphated	150 - 250 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5		
3.50	SL	SM	SH	Phosphated	150 - 250 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5		
4.00	SL	SM	SH	Phosphated	150 - 250 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
4.50	SL	SM	SH	Phosphated	150 - 250 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
5.00	SL	SM	SH	Phosphated	150 - 250 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
5.50	SL	SM	SH	Phosphated	150 - 250 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
6.00	SL	SM	SH	Phosphated	250 - 450 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
6.50	SL	SM	SH	Phosphated	250 - 450 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
7.00	SL	SM	SH	Phosphated	250 - 450 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
7.50	SL	SM	SH	Phosphated	250 - 450 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
8.00	SL	SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
8.50	SL	SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
9.00	SL	SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
9.50	SL	SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
10.00	SL	SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
10.50		SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
11.00		SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
11.50		SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
12.00		SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
12.50		SM		Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
13.00		SM		Phosphated	250 - 450 coil	250 - 450 kg coil	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5

Roping Wire





Technical Specifications

DIA (mm)	COATING		1570 N/mm ²		1770 N/mm ²		1960 N/mm ²	
	Phosphated	Galvanized		Patented		Patented		Patented
0.20	Phosphated	Galvanized						
0.25	Phosphated	Galvanized					1960	Patented
0.30	Phosphated	Galvanized			1770	Patented	1960	Patented
0.35	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.40	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.45	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.50	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.55	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.60	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.65	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.70	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.75	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.80	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.90	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
1.00	Phosphated	Galvanized	1570	Patented	1770	Patented - W/R	1960	Patented - W/R
1.10	Phosphated	Galvanized	1570	Patented - W/R	1770	Patented - W/R	1960	Patented - W/R
1.20	Phosphated	Galvanized	1570	Patented - W/R	1770	Patented - W/R	1960	Patented - W/R
1.30	Phosphated	Galvanized	1570	Patented - W/R	1770	Patented - W/R	1960	Patented - W/R
1.40	Phosphated	Galvanized	1570	Patented - W/R	1770	Patented - W/R	1960	Patented - W/R
1.50	Phosphated	Galvanized	1570	Patented - W/R	1770	Patented - W/R	1960	Patented - W/R
1.60	Phosphated	Galvanized	1570	Patented - W/R	1770	Patented - W/R	1960	Patented - W/R
1.70	Phosphated	Galvanized	1570	Patented - W/R	1770	Patented - W/R	1960	Patented - W/R
1.80	Phosphated	Galvanized	1570	Patented - W/R	1770	Patented - W/R	1960	Patented - W/R




BS60-METAL CABLE DRUM

2160 N/mm ²		PACKING		
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented - W/R		250 - 450 kg Z2	
2160	Patented - W/R		250 - 450 kg Z2	
2160	Patented - W/R		250 - 450 kg Z2	
2160	Patented - W/R			
2160	Patented - W/R			
2160	Patented - W/R			
2160	Patented - W/R			
2160	Patented - W/R			500 - 1000 kg Z3
				500 - 1000 kg Z3
				500 - 1000 kg Z3

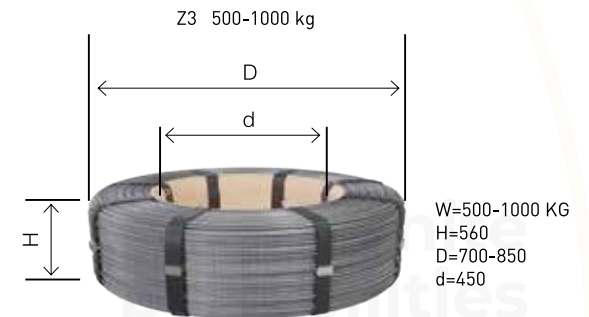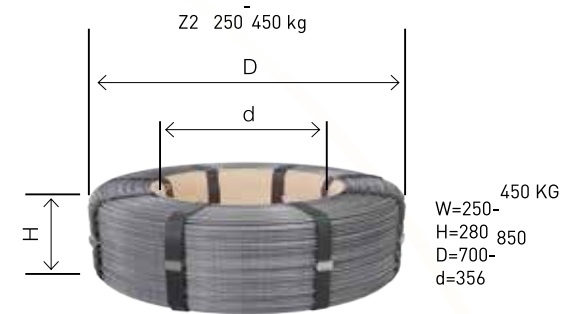


Metalic Spool 25 kg

- K** = 255
- L** = 117
- M** = 167
- N** = 153
- O** = 16 & 33
- Q** = 43
- P** = 3X13

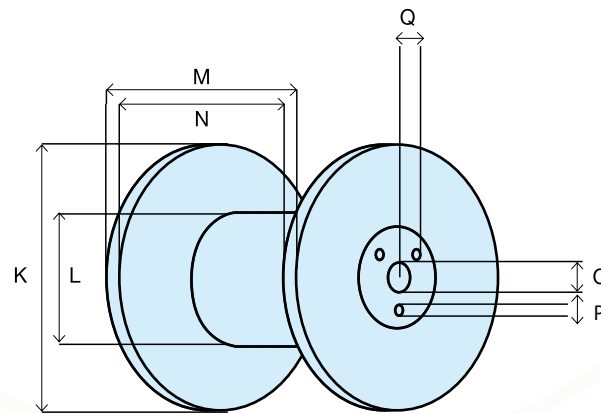

Steel Wire Rope



MONOTRON STEEL ROPES



1x7 Monotron



1x19 Monotron



1x37 Monotron

PVC-COATED STEEL ROPES




6x7 PVC Coated Fibre Core




6x7 PVC Coated Steel Core



6x12+7 PVC Coated Fibre Core

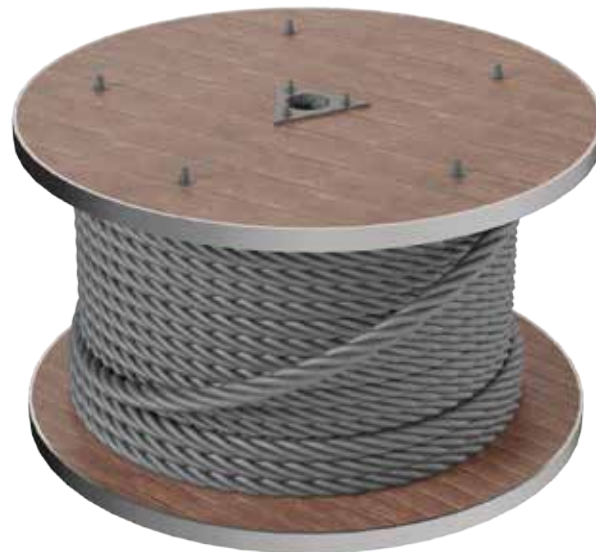

Multiple-Wire Cables



Fishing Ropes (EN12385)

8.00	mm	6x7 Galvanized
10.00	mm	6x7 Galvanized
12.00	mm	6x7 Galvanized
14.00	mm	6x7 Galvanized
16.00	mm	6x7 Galvanized
14.00	mm	6x19 Seale Galvanized
16.00	mm	6x19 Seale Galvanized
18.00	mm	6x19 Seale Galvanized
20.00	mm	6x19 Seale Galvanized
22.00	mm	6x19 Seale Galvanized

Crane Ropes (EN12385)

10.00	mm	6x36 WS
12.00	mm	6x36 WS
14.00	mm	6x36 WS
16.00	mm	6x36 WS
18.00	mm	6x36 WS
18.00	mm	6x36 WS
20.00	mm	6x36 WS
22.00	mm	6x36 WS
24.00	mm	6x36 WS
26.00	mm	6x36 WS
28.00	mm	6x36 WS

Automotive Ropes

(Standard According to Customer Requirement)

1x7	Composition	1,50 mm - 10,00 mm
1x19	Composition	1,50 mm - 20,00 mm
1x25	Composition	3,00 mm - 5,00 mm
1x37	Composition	3,00 mm - 6,00 mm
1x19	Composition	6,00 mm - 20,00 mm

General Application Ropes (EN12385)

6.00	mm	6x19 Standard
8.00	mm	6x19 Standard
10.00	mm	6x19 Standard
12.00	mm	6x19 Standard
14.00	mm	6x19 Standard
16.00	mm	6x19 Standard
18.00	mm	6x19 Standard
20.00	mm	6x19 Standard
22.00	mm	6x19 Standard
24.00	mm	6x19 Standard

Elevator Ropes (EN12385)


8.00	mm	8x19 Seale
10.00	mm	8x19 Seale
11.00	mm	8x19 Seale
12.00	mm	8x19 Seale
6.00	mm	8x19 Seale
6.00	mm	8x19 Seale

Tower Crane Ropes (EN12385)

6.00	mm	19x7 Non-Rotating
8.00	mm	19x7 Non-Rotating
10.00	mm	19x7 Non-Rotating
12.00	mm	19x7 Non-Rotating
14.00	mm	19x7 Non-Rotating
16.00	mm	19x7 Non-Rotating
18.00	mm	19x7 Non-Rotating

Highway Ropes (EN12385)


19.00	mm	1x19
19.00	mm	3x7

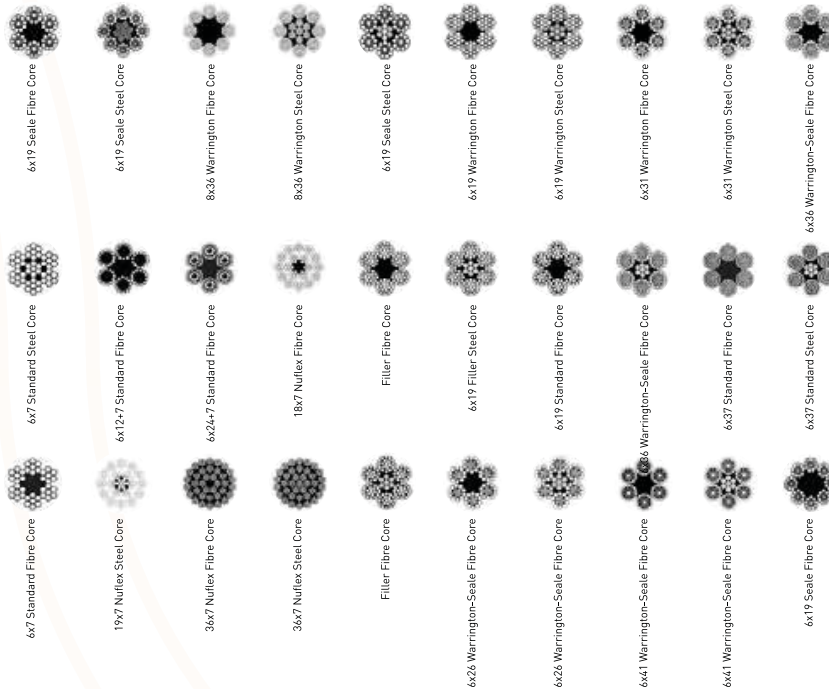

Notes: We can also produce steel wire ropes according to our valuable customer's requirements. We've started to produce Glozy products (95% Zinc, 5% Aluminium) and trial orders have been also started.

***Please contact us if you have any requests for fibre or steel core cables with different constructions.**


ACSR Rope



Technical Specifications

Material	High-carbon steel wire
Coating	Hot-dip galvanized (Zn)
Wire Diameter	1,24-5,50 mm
Coating Thickness	Between 100 gr/m ² and 350 gr/m ²
Tensile Strength	1240-1770 N/mm ²
Coil Weight	400-1200 kg
Packaging	Multiples of 1000 meters packed around 500-mm and 1300-mm spool
Areas of Use	Overhead line conductors, the agriculture industry
Standards	EN 50189-ASTM B498
Construction	1x7-1x19 (1+6+12)

Tragen-Elevator Rope



Technical Specifications



Diameter (mm)	6.5
	8
	10
	12
	14
	16
	18
Construction	8X19 Warrington (8x(1+6+6+6))
	8X19 Seale (8x(1+9+9))
	8X19 Seale (8x(1+9+9)) Dual Tensile
Strength (N/mm ²)	1370
	1770



PERIMETER PROTECTION AND SECURITY SYSTEMS



Panadorf 3D




Technical Specifications


Areas of Use	These fence components are used to create private gardens, walled-in spaces and special indoor and outdoor areas with decorative purposes.
Primary Color	RAL 6005 GREEN, RAL 7016 ANTHRACITE
Color Alternatives	The primary color fo all PANADORF 3D series components, which are manufactured pre-painted, is RAL 6005 GREEN and the components can be produced in different colors in case of sufficient demand.
Production Properties	These can be supplied in unpainted, galvanized or black forms.



Line wire 5 x 15

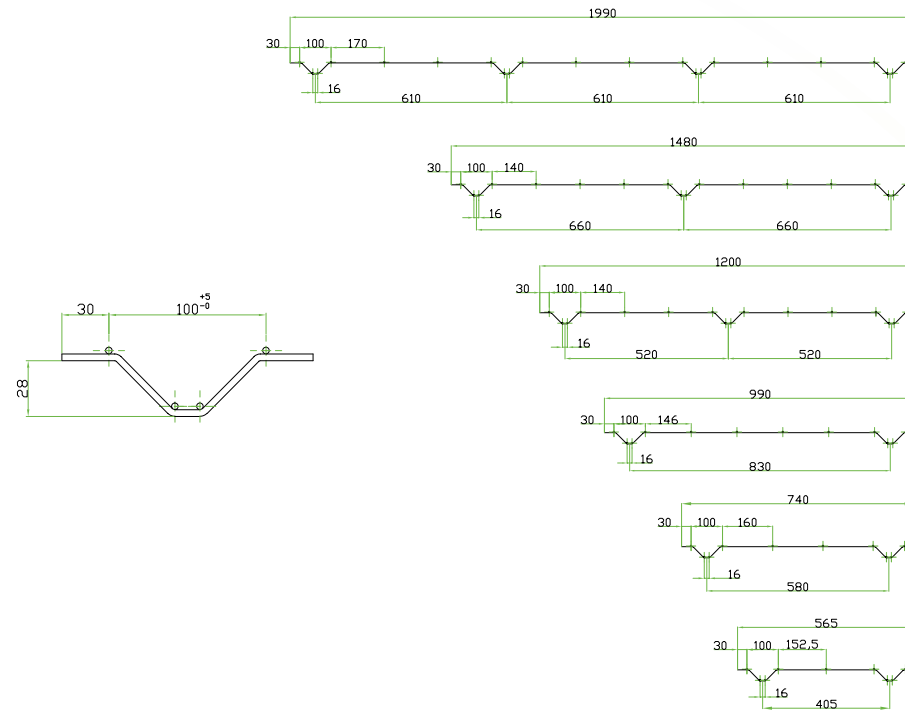


Line wire 5 x 20

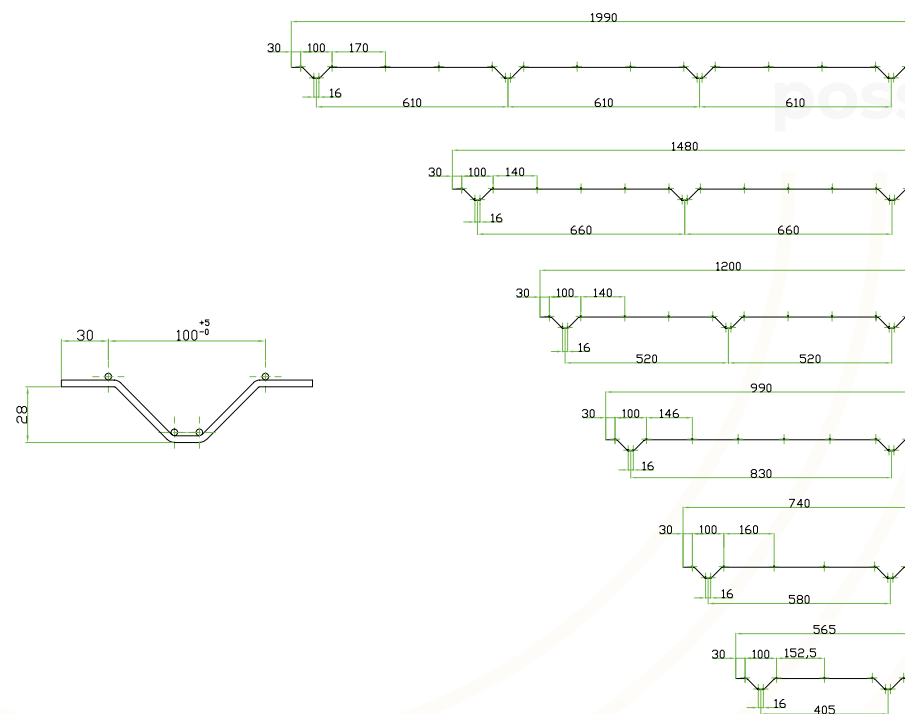

infinite possibilities

Panadorf Double

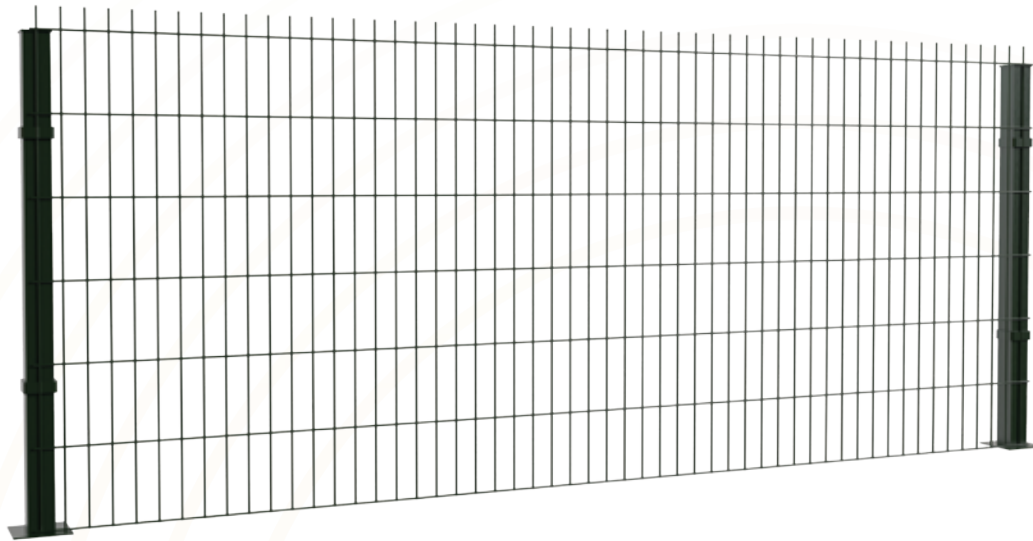

Technical Specifications

Areas of Use

These components are used for defining the boundaries and securing the perimeter around areas with high security requirements, spaces used for infrastructure and transport services and public areas, as well as industrial and agricultural areas. They are also used to prevent or impede the entry of people and animals to such areas. While offering these benefits, they also ensure for the said places and areas to have an image that is conformity with their surroundings.

Primary Color

RAL 6005 GREEN, RAL 7016 ANTHRACITE


Color Alternatives

The primary color fo all PANADORF DOUBLE series components, which are manufactured pre-painted, is RAL 6005 GREEN and the components can be produced in different colors in case of sufficient demand.


Production Properties

These can also be provided without paint, in galvanized form.






Line wire 50-200 6x5x6

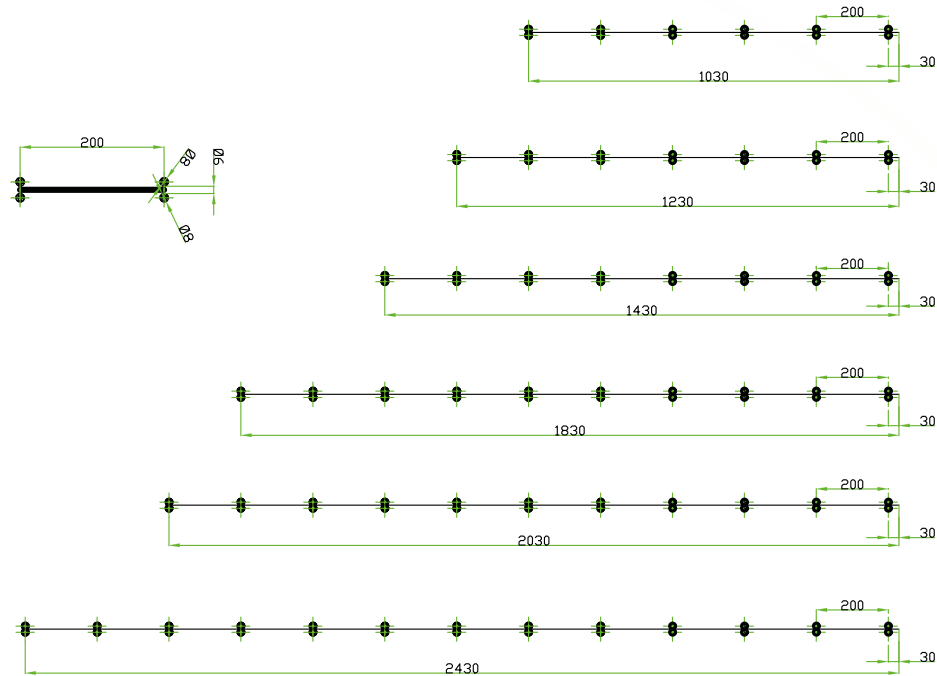

Line wire 50-200 8x6x8

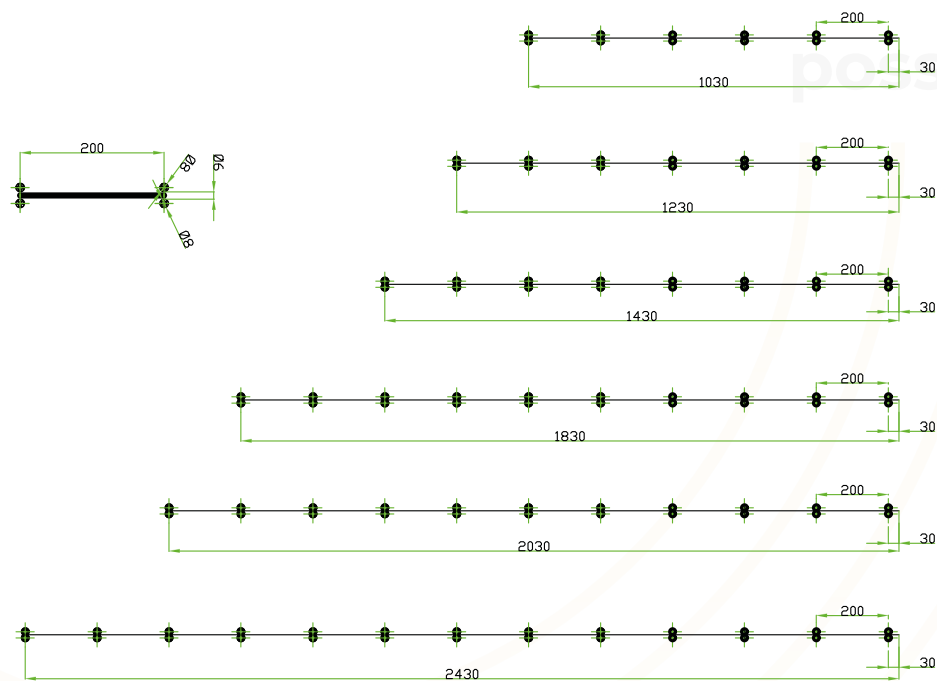

infinite possibilities

Panadorf Secure




Technical Specifications

Areas of Use	These components are used for defining the boundaries and securing the perimeter around areas with high security requirements, spaces used for infrastructure and transport services and public areas, as well as industrial and agricultural areas. They are also used to prevent or impede the entry of people and animals to such areas. While offering these benefits, they also ensure for the said places and areas to have an image that is conformity with their surroundings.
Primary Color	The primary color fo all PANADORF SECURE series components, which are manufactured pre-painted, is RAL 6005 GREEN and the components can be produced in different colors in case of sufficient demand.
Color Alternatives	These can also be provided without paint, in galvanized form.

Production Properties

MESH SIZE		CROSS WIRE / LINE WIRE		COMPONENT MEASUREMENTS	
HORIZONTAL	VERTICAL	DIAMETER in mm		HEIGHT	LENGHT
76,2	12,7	4,00	4,00	2.000	2.000
		4,00	4,00	2.500	2.500

Notes: The measurements in the table are **STANDARD INVENTORY** measurements and it is possible for components to be produced at the measurements required by customers upon request. The delivery dates for the custom-manufactured components depend on the production schedule at the time of the order.

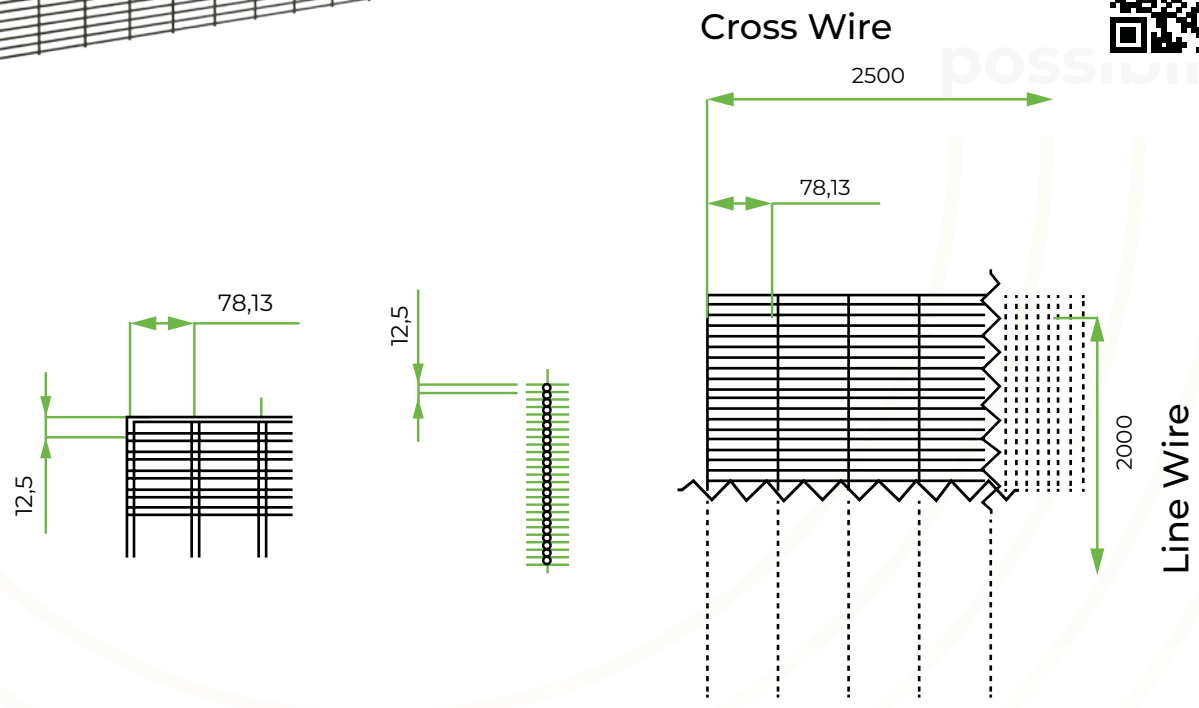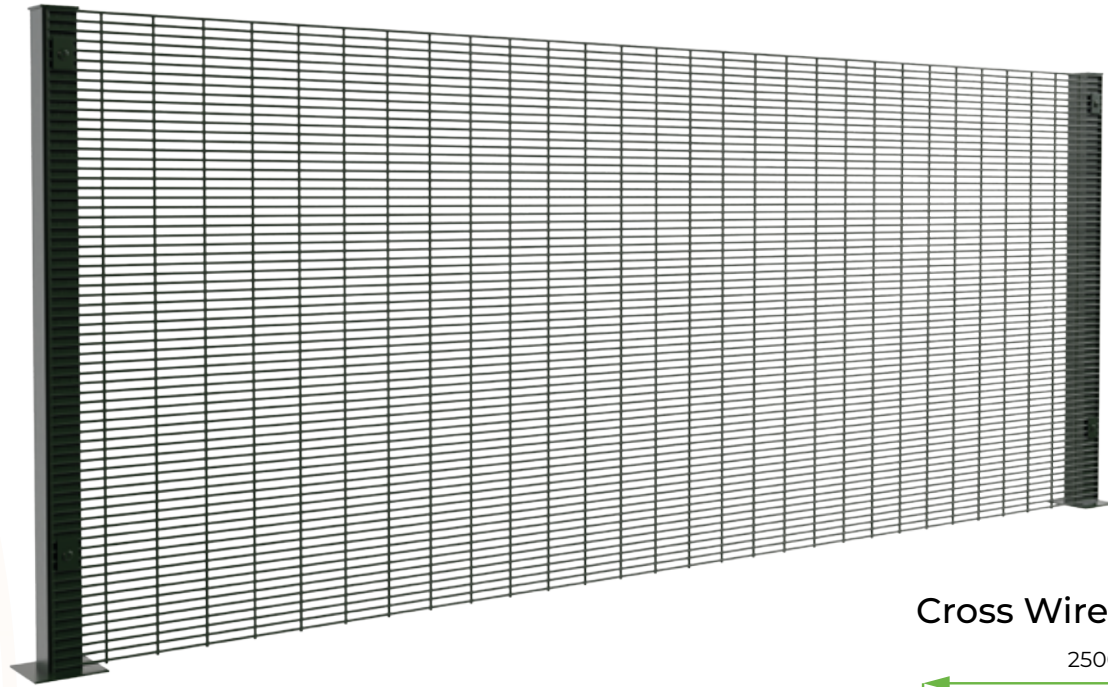

Panadorf Euro



Technical Specifications

Areas of Use

The product is used for establishing the boundaries and securing the perimeter of residences, gardens, public areas, industrial facilities and agricultural spaces. It is also used as fencing for creating and protecting personal, private and public areas and forming gardens, walled-in areas, indoor or outdoor sections for decorative purposes.

Primary Color


RAL 6005 GREEN, RAL 7016 ANTHRACITE

Color Alternatives







The primary color for all PANADORF EURO series components, which are manufactured pre-painted, is RAL 6005 GREEN and the components can be produced in different colors in case of sufficient demand. These can also be provided without paint, in galvanized form.

Production Properties

Mesh Size	50 x 200 mm / 55 x 200 mm
Wire Diameter	4,00 mm 5,00 mm
Height	830 mm - 2.930
Horizontal Length	2000 mm - 2500 mm
Color	All RAL 6005 range of colors or galvanized only



Line wire

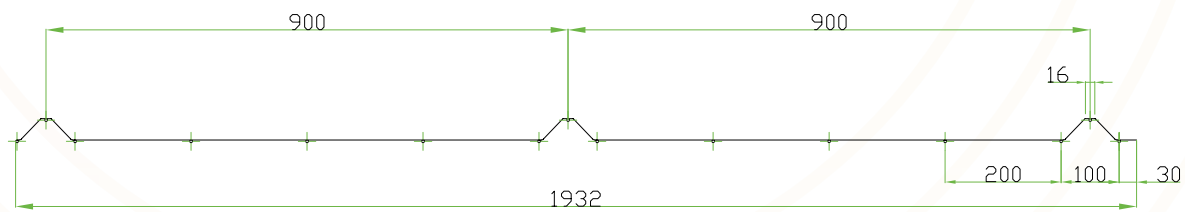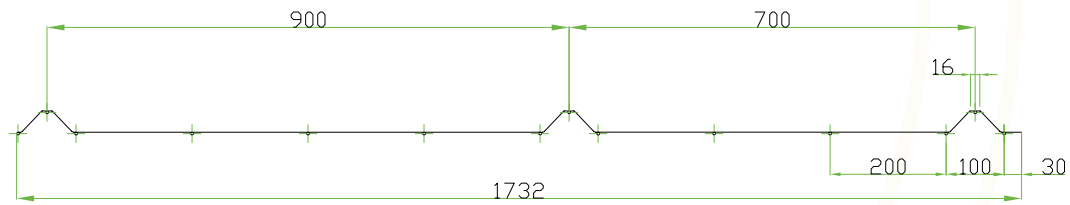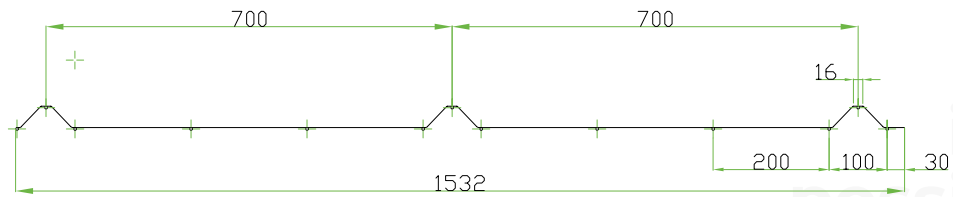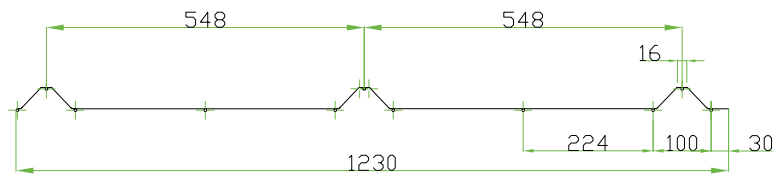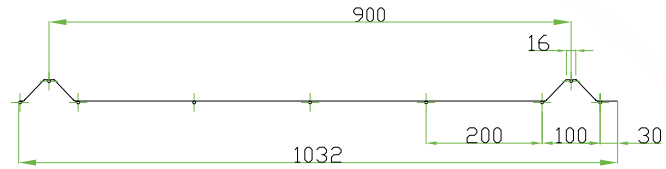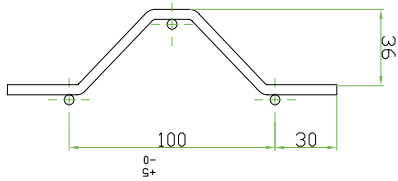


infinite possibilities



AGRICULTURE



Chain Link Fence

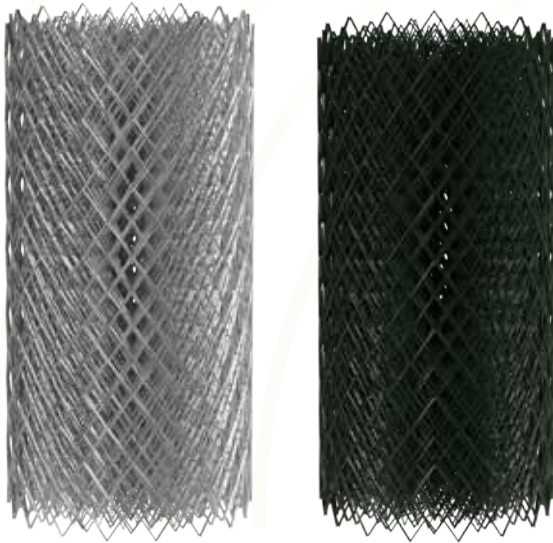

Technical Specifications

PVC

We provide extra protection for customers who wish a longer service life in addition to economy in a security product by coating galvanized spiral wires with PVC.

Areas of Use

These are areas where PVC-coated spiral wires are used frequently, such as highways, railways, fields, residential areas and parking lots.

Wire Diameter

Strength

Between 3,00 mm
and 3,50 mm


350-500 N/mm²

Zinc Coating

Mesh Size

50 g/m²

50 mm / 60 mm / 75 mm



Technical Specifications



Areas of Use

The fence components manufactured with galvanized wires can be used safely for many years by means of their high corrosion resistance.

Advantages

Easy installation is another reason for these galvanized roll fence components to be preferred.

Wire Diameter

Between 2,00 mm
and 3,50 mm

Zinc Coating

50 g/m²

Strength

350-500 N/mm²

Mesh Size

50 mm / 60 mm / 75 mm

infinite
possibilities



CERTIFICATES



TÜRK STANDARLARI ENSTİTÜSÜ
TÜRK STANDARLARINA UYGUNLUK BELGESİ
TURKISH STANDARDS INSTITUTION
CERTIFICATE OF CONFORMITY TO TURKISH STANDARDS

BELEGE NUMARASI
REFERENCE NUMBER OF LICENCE 003377-TSE-04-02

BELEGENİN İLK VERİŞİŞ TARİHİ
DATE OF FIRST ISSUE OF LICENCE 10.06.2023

BELEGENİN SON GEÇERLİLİK TARİHİ
LICENCE VALID UNTIL 06.03.2024

BELEGE SAHİBİ KURULUŞUN ADI
NAME OF THE LICENCE HOLDER OZYAŞAR TEL VE GALVANİZLEME SANAYİ ANONİM ŞİRKETİ

BELEGE SAHİBİ KURULUŞUN ADRESİ
ADDRESS OF THE LICENCE HOLDER BEYTİNZAM MAHALLESİ DEMİRCİLER SİTESİ 10. CAD. AYDAR B BLOK APT. NO:75 ZEYTİNLİSİ İSTANBUL/TÜRKİYE

ÜRETİM YERİ ADI
NAME OF THE MANUFACTURING PLACE OZYAŞAR TEL VE GALVANİZLEME SANAYİ A.Ş.

ÜRETİM YERİ ADRESİ
ADDRESS OF THE MANUFACTURING PLACE FEVZİPAŞA MAH. GÖLET CAD. NO:15 DEĞİRMENKÖY SİLİRLİ İSTANBUL / TÜRKİYE

İPTAL EDİLEN BELEGE NUMARASI (Varış)
INDICATION OF SUPERSEDED LICENCE (if any) 003377-TSE-0401

TEŞCİLİ TİCARİ MARKASI
REGISTERED TRADE MARK Ozyaşar tel ve galvanizleme san a.ş.

İLGİLİ TÜRK STANDARDI
RELATED TURKISH STANDARD TS EN 10224-2:2012 / 12.06.2013

BELEGE KAPSAMI
SCOPE OF LICENCE

* "BİR" ÇİNKO İÇİN ÇELİK TEL VE TEL MAMULLERİ ÇİNKO ALAŞIM KAPLAMALI ÇELİK TEL ÇİTİ
TELSİZİMİNİN İÇİN ÇİNKO ALAŞIM KAPLAMALI ÇELİK TEL ÇİTİ
ANILAN İKİ TÜRÜN EN 10244-2:2012 İSTANBUL BELGELENDİRME MERKEZİ (2H)
KAPLAMASI
ANILAN İKİ TÜRÜN ÇİNKO İÇİN ÇELİK TEL VE TEL MAMULLERİNİN İÇİN ÇİNKO ALAŞIM KAPLAMALI ÇELİK TEL ÇİTİ
AD ÜÇÜNDEN 30 mm, TEL ANAMA ÇAP: 2.00 mm (DİAHELDEN 3.00 mm (DİAHELDİYE KADAR)
AD ÜÇÜNDEN 60 mm, TEL ANAMA ÇAP: 2.00 mm (DİAHELDEN 3.00 mm (DİAHELDİYE KADAR)
AD ÜÇÜNDEN 75 mm, TEL ANAMA ÇAP: 2.00 mm (DİAHELDEN 3.00 mm (DİAHELDİYE KADAR)

* ÇİNKO VEYA ÇİNKO ALAŞIM KAPLAMALI ÇELİK TEL VE TEL MAMULLERİ
KAPLAMA KÜTLEŞİ ENİF: A, B, B, C, D
TEL ANAMA ÇAP: 0.8 mm (DİAHELDEN 8.0 mm (DİAHELDİYE KADAR)

İSTANBUL BELGELENDİRME MÜDÜRÜ V.
Belgeleme Merkezi Başkanı Adına
MERİÇ KARACAN

03.06.2023
e-mza ile onaylı
30.06.2023

Belgeleme Merkezi Başkanı Adına
MERİÇ KARACAN

İSTANBUL BELGELENDİRME MÜDÜRÜ V.

<https://www.tse.org.tr> BelgelemeMerkezi@tse.org.tr <https://www.tse.org.tr> BelgelemeMerkezi@tse.org.tr

1 / 2

TÜRK STANDARLARI ENSTİTÜSÜ
TÜRK STANDARLARINA UYGUNLUK BELGESİ
TURKISH STANDARDS INSTITUTION
CERTIFICATE OF CONFORMITY TO TURKISH STANDARDS

BELEGE NUMARASI
REFERENCE NUMBER OF LICENCE 003377-TSE-05-02

BELEGENİN İLK VERİŞİŞ TARİHİ
DATE OF FIRST ISSUE OF LICENCE 06.04.2016

BELEGENİN SON GEÇERLİLİK TARİHİ
LICENCE VALID UNTIL 14.07.2023

BELEGE SAHİBİ KURULUŞUN ADI
NAME OF THE LICENCE HOLDER OZYAŞAR TEL VE GALVANİZLEME SANAYİ ANONİM ŞİRKETİ

BELEGE SAHİBİ KURULUŞUN ADRESİ
ADDRESS OF THE LICENCE HOLDER BEYTİNZAM MAHALLESİ DEMİRCİLER SİTESİ 10. CAD. AYDAR B BLOK APT. NO:75 ZEYTİNLİSİ İSTANBUL/TÜRKİYE

ÜRETİM YERİ ADI
NAME OF THE MANUFACTURING PLACE OZYAŞAR TEL VE GALVANİZLEME SANAYİ A.Ş.

ÜRETİM YERİ ADRESİ
ADDRESS OF THE MANUFACTURING PLACE FEVZİPAŞA MAH. GÖLET CAD. NO:15 DEĞİRMENKÖY SİLİRLİ İSTANBUL / TÜRKİYE

İPTAL EDİLEN BELEGE NUMARASI (Varış)
INDICATION OF SUPERSEDED LICENCE (if any) 003377-TSE-0501

TEŞCİLİ TİCARİ MARKASI
REGISTERED TRADE MARK Ozyaşar tel ve galvanizleme san a.ş.

İLGİLİ TÜRK STANDARDI
RELATED TURKISH STANDARD TS EN 10224-2:2012 / 12.06.2013

BELEGE KAPSAMI
SCOPE OF LICENCE

* "BİR" ÇİNKO İÇİN ÇELİK TELDEN KAYNAKLI PANÇLAR
KAYNAKTAN ÖNCE ÇİNKO VEYA ÇİNKO ALAŞIM KAPLAMASI VE ÖRGANİK KAPLAMA YAPILMASI

İSTANBUL BELGELENDİRME MÜDÜRÜ V.
Belgeleme Merkezi Başkanı Adına
MERİÇ KARACAN

03.06.2023
e-mza ile onaylı
30.06.2023

Belgeleme Merkezi Başkanı Adına
MERİÇ KARACAN

İSTANBUL BELGELENDİRME MÜDÜRÜ

<https://www.tse.org.tr> BelgelemeMerkezi@tse.org.tr <https://www.tse.org.tr> BelgelemeMerkezi@tse.org.tr

1 / 1

TÜRK STANDARLARI ENSTİTÜSÜ
TÜRK STANDARLARINA UYGUNLUK BELGESİ
TURKISH STANDARDS INSTITUTION
CERTIFICATE OF CONFORMITY TO TURKISH STANDARDS

BELEGE NUMARASI
REFERENCE NUMBER OF LICENCE 08846-TSE-01-03

BELEGENİN İLK VERİŞİŞ TARİHİ
DATE OF FIRST ISSUE OF LICENCE 09.03.2023

BELEGENİN SON GEÇERLİLİK TARİHİ
LICENCE VALID UNTIL 09.03.2024

BELEGE SAHİBİ KURULUŞUN ADI
NAME OF THE LICENCE HOLDER OZYAŞAR TEL ÖRME VE DOKUMA TEL GALVANİZLEME ÇİVİ SANAYİ TİCARİT ANONİM ŞİRKETİ

BELEGE SAHİBİ KURULUŞUN ADRESİ
ADDRESS OF THE LICENCE HOLDER ORGANİZE SAN. BÖL. OSB İNÖNÜ BL. İADEÇİ NO:19 SARIÇAM ADANA/TÜRKİYE

ÜRETİM YERİ ADI
NAME OF THE MANUFACTURING PLACE OZYAŞAR TEL ÖRME VE DOKUMA TEL GALVANİZLEME ÇİVİ SAN. T.C.A.Ş.

ÜRETİM YERİ ADRESİ
ADDRESS OF THE MANUFACTURING PLACE ADANA HACI SABANCI ORGANİZE SANAYİ BÖLGESİ OSB İNÖNÜ BULVARI NO:19, SARIÇAM ADANA / TÜRKİYE

İPTAL EDİLEN BELEGE NUMARASI (Varış)
INDICATION OF SUPERSEDED LICENCE (if any) 08846-TSE-01-02

TEŞCİLİ TİCARİ MARKASI
REGISTERED TRADE MARK OZYAŞAR ŞEKİL

İLGİLİ TÜRK STANDARDI
RELATED TURKISH STANDARD TS EN 10344-2:2009 / 22.11.2011

BELEGE KAPSAMI
SCOPE OF LICENCE

* ÇİNKO VEYA ÇİNKO ALAŞIM KAPLAMALI ÇELİK TEL VE TEL MAMULLERİ
KAPLAMA KÜTLEŞİ ENİF: B, C, D
TEL ANAMA ÇAP: 0.5 mm (DİAHELDEN 5.0 mm) YA KADAR

İSTANBUL BELGELENDİRME MÜDÜRÜ V.
Belgeleme Merkezi Başkanı Adına
MURAT SAHİRCİ ANONİM

09.03.2023
e-mza ile onaylı
30.06.2023

Belgeleme Merkezi Başkanı Adına
MURAT SAHİRCİ ANONİM

İSTANBUL BELGELENDİRME MÜDÜRÜ V.

<https://www.tse.org.tr> BelgelemeMerkezi@tse.org.tr <https://www.tse.org.tr> BelgelemeMerkezi@tse.org.tr

1 / 1

TÜRK STANDARLARI ENSTİTÜSÜ
TÜRK STANDARLARINA UYGUNLUK BELGESİ
TURKISH STANDARDS INSTITUTION
CERTIFICATE OF CONFORMITY TO TURKISH STANDARDS

BELEGE NUMARASI
REFERENCE NUMBER OF LICENCE 003377-TSE-03-04

BELEGENİN İLK VERİŞİŞ TARİHİ
DATE OF FIRST ISSUE OF LICENCE 05.07.2015

BELEGENİN SON GEÇERLİLİK TARİHİ
LICENCE VALID UNTIL 14.07.2023

BELEGE SAHİBİ KURULUŞUN ADI
NAME OF THE LICENCE HOLDER OZYAŞAR TEL VE GALVANİZLEME SANAYİ ANONİM ŞİRKETİ

BELEGE SAHİBİ KURULUŞUN ADRESİ
ADDRESS OF THE LICENCE HOLDER BEYTİNZAM MAHALLESİ DEMİRCİLER SİTESİ 10. CAD. AYDAR B BLOK APT. NO:75 ZEYTİNLİSİ İSTANBUL/TÜRKİYE

ÜRETİM YERİ ADI
NAME OF THE MANUFACTURING PLACE OZYAŞAR TEL VE GALVANİZLEME SANAYİ A.Ş.

ÜRETİM YERİ ADRESİ
ADDRESS OF THE MANUFACTURING PLACE FEVZİPAŞA MAH. GÖLET CAD. NO:15 DEĞİRMENKÖY SİLİRLİ İSTANBUL / TÜRKİYE

İPTAL EDİLEN BELEGE NUMARASI (Varış)
INDICATION OF SUPERSEDED LICENCE (if any) 003377-TSE-03-03

TEŞCİLİ TİCARİ MARKASI
REGISTERED TRADE MARK OZYAŞAR

İLGİLİ TÜRK STANDARDI
RELATED TURKISH STANDARD TS EN 10244-2 / 18.06.2014

BELEGE KAPSAMI
SCOPE OF LICENCE

* ÇİNKO VEYA ÇİNKO ALAŞIM KAPLAMALI ÇELİK TEL VE TEL MAMULLERİ
KAPLAMA KÜTLEŞİ ENİF: A, B, B, C, D
TEL ANAMA ÇAP: 0.8 mm (DİAHELDEN 8.0 mm (DİAHELDİYE KADAR)

İSTANBUL BELGELENDİRME MÜDÜRÜ V.
Belgeleme Merkezi Başkanı Adına
MERİÇ KARACAN

03.06.2023
e-mza ile onaylı
30.06.2023

Belgeleme Merkezi Başkanı Adına
MERİÇ KARACAN

İSTANBUL BELGELENDİRME MÜDÜRÜ

<https://www.tse.org.tr> BelgelemeMerkezi@tse.org.tr <https://www.tse.org.tr> BelgelemeMerkezi@tse.org.tr

1 / 1

İSTANBUL SANAYİ ODASI

YERLİ MALİ BELGESİ

Belgenin Veriliş Tarihi : 23.02.2023 Belgenin Geçerlilik Tarihi : 23.02.2024 Belge No : 20231083108930
Ünvanı Devran: OZYAŞAR TEL VE GALVANİZLEME SANAYİ ANONİM ŞİRKETİ
İşyeri Adresi: Fevzipaşa Mah. Gölet Cad. No.15 SİLİRLİ/İSTANBUL
Ünvanın Vergi Kimlik No: 7170022641 TC Kimlik No: MERSİS No: 071700226410001
Telefon: 212-4348444 E-posta: info@ozyasar.com.tr
Faks: 212-7322411 Web Adresi: www.ozyasar.com.tr
Ticaret Sicil No: 21288 Dye Sicil No: 7351
Oran Adı: Galvanizli tel (sarıklı daldırma)
Oran Kodu (PROCODOMGTTP): 24.34.11.31.00 /
Ticaret Sicil No: 21288 Dye Sicil No: 7351
Kapatma Raporunun Tarih: 21.06.2023 No: 26598 İşyeri Hük. Sicil No: 21.06.2024
Sanayi Sicil Belgenin Tarih: 01.10.2009 No: 508004
Yerli Kaah Oran: % 83.54
Ünvanın Teknolojik Düzeyi (dijital/orta-dijital/orta-yüksek/yüksek/ülçerimsiz): orta-dijital
Diğer bilgi ve belgeler

İşbu belge, Bilim, Sanayi ve Teknoloji Bakanlığı'nın 13/09/2014 tarih ve 29118 sayılı Resmî Gazetesinde yayımlanan "Yerli Mali Tebliği (EKİM 2014/13)" ve tebliğin ve 10/08/2016 tarihli Bakanlar Kurulu Kararı ile değiştirilen "Yerli Mali Belgenin Dönüştürülmesi Yılığında Karşılıklı" ile 23.02.2023 tarihinde düzenlenmiştir. Belgenin geçerlilik süresi, tebliğin tarihinden itibaren bir yıldır geçerlidir.

Düzenleyen Müdüres
İSTANBUL SANAYİ ODASI

İSTANBUL BELGELENDİRME MÜDÜRÜ V.
Belgeleme Merkezi Başkanı Adına
MERİÇ KARACAN

03.06.2023
e-mza ile onaylı
30.06.2023

Belgeleme Merkezi Başkanı Adına
MERİÇ KARACAN

İSTANBUL BELGELENDİRME MÜDÜRÜ

<https://www.tse.org.tr> BelgelemeMerkezi@tse.org.tr <https://www.tse.org.tr> BelgelemeMerkezi@tse.org.tr

1 / 1



kiwa

ÇOKYAŞAR
ÇOKYAŞAR HALAT MAKİNA TEL GALVANİZLEME
SANAYİ TİCARET ANONİM ŞİRKETİ
GÜMÜŞOVA ŞUBESİ

ÇAYIROĞU KÖYÜ, ÇAYIROĞU MEYDANI ANKARA SOYAK NO: 45 GÜMÜŞOVA - DÜZCE - TÜRKİYE

**CELİK HALAT, ÇELİK TEL, YATKICI TEL, PATENTLİ VE GALVANİZLİ
TEL ÜRETİMİ**

Kapsamında

ISO 45001:2018
İş Sağlığı ve Güvenliği Yönetim Sistemi Standartına
uygun bir sistem kurmuştur.

Sertifika No : M 0946
Başlangıç Tarihi : 04 Şubat 2023
Sertifika Tarihi : 03 Mart 2023
Son Geçerlilik Tarihi : 02 Mart 2025


Genel Müdür

Sertifika San Günüselene Tarihi: 03 Mart 2023 - 8/30

Kiwa Belgelendirme Hizmetleri A.Ş.
TÜRK E. Cadde No: 15, Tuzluca Turizm
Mahallesi / Tuzluca

Tel : +90 338 500 20 70
Faks : +90 338 500 20 24
www.kiwa.com.tr

Sertifika yetkilisi ve denetimci
Başkanı Dr. İsmet Aksoy
Denetimci Başkanı Dr. Mehmet Aksoy
Denetimci Uzmanları Dr. Mustafa Aksoy

kiwa

CERTIFICATE

Belge No: 16949-1
Sertifika No: 2023-00418
Sertifika Tarihi: 2023/04-01
Sertifika No: 2023-00418
Sertifika Tarihi: 2023/04-01

Quality Management System Certificate
IATF 16949:2016

We certify that the Quality Management System of the Organization
**ÇOKYAŞAR HALAT MAKİNE TEL
GALVANİZLEME SAN. VE TIC. A.Ş.**
is in conformity with the standard IATF 16949:2016 for the following
product description:
Manufacturing of high carbon steel wires and wire rope by drawing, stranding
and phosphating.

Photo of the
Sample of the Product



Belge No: 16949-1
Sertifika No: 2023-00418
Sertifika Tarihi: 2023/04-01
Sertifika No: 2023-00418
Sertifika Tarihi: 2023/04-01

ÇOKYAŞAR HALAT MAKİNE TEL GALVANİZLEME SAN VE TIC. A.Ş.
Çayiroğlu Köyü, Çayiroğlu Meydanı Sok. No: 45, 37100 Çayiroğlu, Düzce, Türkiye



TÜRK STANDARLARI ENSTİTÜSÜ
TÜRK STANDARLARINA UYGUNLUK BELGESİ
TURKISH STANDARDS INSTITUTION
CERTIFICATE OF CONFORMITY TO TURKISH STANDARDS

Belge No: 02557-TSE-0102
TSE

BELGE NUMARASI REFERENCE NUMBER OF LICENCE	02557-TSE-0102
BELGENİN İLK VERİŞİ TARİHİ DATE OF FIRST ISSUE OF LICENCE	11.03.2009
BELGENİN SON GEÇERLİLİK TARİHİ DATE OF LAST VALIDITY	08.05.2023
BELGE SAHİBİ KURULUŞUN ADI NAME OF THE LICENCE HOLDER	ÇOKYAŞAR HALAT MAKİNA TEL GALVANİZLEME SAN. VE TIC. A.Ş.
BELGE SAHİBİ KURULUŞUN ADRESİ ADDRESS OF THE LICENCE HOLDER	YENİBOSNA MERKEZ MAHSEMET KAVAK SK. NO:3 BAĞÇELİEVLER İSTANBUL/TÜRKİYE
ÜRETİM YERİ ADI NAME OF THE MANUFACTURING PLACE	ÇOKYAŞAR HALAT MAKİNA TEL GALVANİZLEME SANAYİ TİCARET ANONİM ŞİRKETİ
ÜRETİM YERİ ADRESİ ADDRESS OF THE MANUFACTURING PLACE	D.100 KARAYOLU ÜZERİ ÇAYIROĞU MEYDANI GÜZCE / TÜRKİYE
İPTAL EDİLEN BELGE NUMARASI (Varsa) NUMBER OF REVOKED LICENCE (if any)	02557-TSE-0101
TESLİMİ TİCARİ MARKASI REGISTERED TRADE MARK	ÇOKYAŞAR HALAT
İLGİLİ TÜRK STANDARDI RELATED TURKISH STANDARD	TS EN 12385-5 / 29.04.2005
BELGE KAPSAMI SCOPE OF LICENCE	TS EN 12385-5/29.04.2005 ÇELİK TEL HALATLARIN GÜVENLİK BÖLÜMÜ ESAS ÖLÇÜLERİ İÇİN HALATLAR • ÇELİK TEL HALATLAR ESAS ÖLÇÜLERİ İÇİN • SİNİF 6x19 - HALAT MUKAVEMET SİNİFİ F770 kN (LİF ÖZLÜ), ANMA ÇAP: 6mm (DAHL) / DEN -14 mm (DAHL'E KADAR OLANLAR) • SİNİF 6x19 - HALAT MUKAVEMET SİNİFİ F770 kN (LİF ÖZLÜ), ANMA ÇAP: 8mm (DAHL) / DEN -20 mm (DAHL'E KADAR OLANLAR) • SİNİF 6x26 - HALAT MUKAVEMET SİNİFİ F770 kN (LİF ÖZLÜ), ANMA ÇAP: 12mm (DAHL) / DEN -28 mm (DAHL'E KADAR OLANLAR)

02.05.2022
Belgelendirme Merkezi Başkanı Adına
ÖMER FARUK DÜMAN
SARAYIA BELGELENDİRME MÜDÜRÜ

1 / 1

TÜRK STANDARLARI ENSTİTÜSÜ
TÜRK STANDARLARINA UYGUNLUK BELGESİ
TURKISH STANDARDS INSTITUTION
CERTIFICATE OF CONFORMITY TO TURKISH STANDARDS

Belge No: 02557-TSE-0102
TSE

BELGE NUMARASI REFERENCE NUMBER OF LICENCE	02557-TSE-0102
BELGENİN İLK VERİŞİ TARİHİ DATE OF FIRST ISSUE OF LICENCE	11.03.2009
BELGENİN SON GEÇERLİLİK TARİHİ DATE OF LAST VALIDITY	12.10.2023
BELGE SAHİBİ KURULUŞUN ADI NAME OF THE LICENCE HOLDER	ÇOKYAŞAR HALAT MAKİNA TEL GALVANİZLEME SAN. VE TIC. A.Ş.
BELGE SAHİBİ KURULUŞUN ADRESİ ADDRESS OF THE LICENCE HOLDER	YENİBOSNA MERKEZ MAHSEMET KAVAK SK. NO:3 BAĞÇELİEVLER İSTANBUL/TÜRKİYE
ÜRETİM YERİ ADI NAME OF THE MANUFACTURING PLACE	ÇOKYAŞAR HALAT MAKİNA TEL GALVANİZLEME SANAYİ TİCARET ANONİM ŞİRKETİ
ÜRETİM YERİ ADRESİ ADDRESS OF THE MANUFACTURING PLACE	D.100 KARAYOLU ÜZERİ ÇAYIROĞU MEYDANI GÜZCE / TÜRKİYE
İPTAL EDİLEN BELGE NUMARASI (Varsa) NUMBER OF REVOKED LICENCE (if any)	02557-TSE-0101
TESLİMİ TİCARİ MARKASI REGISTERED TRADE MARK	ÇOKYAŞAR HALAT
İLGİLİ TÜRK STANDARDI RELATED TURKISH STANDARD	TS EN 12385-5 / 29.04.2005
BELGE KAPSAMI SCOPE OF LICENCE	TS EN 12385-5/29.04.2005 ÇELİK TEL HALATLARIN GÜVENLİK BÖLÜMÜ ESAS ÖLÇÜLERİ İÇİN HALATLAR • ÇELİK TEL HALATLAR ESAS ÖLÇÜLERİ İÇİN • SİNİF 6x19 - HALAT MUKAVEMET SİNİFİ F770 kN (LİF ÖZLÜ), ANMA ÇAP: 6mm (DAHL) / DEN -14 mm (DAHL'E KADAR OLANLAR) • SİNİF 6x19 - HALAT MUKAVEMET SİNİFİ F770 kN (LİF ÖZLÜ), ANMA ÇAP: 8mm (DAHL) / DEN -20 mm (DAHL'E KADAR OLANLAR) • SİNİF 6x26 - HALAT MUKAVEMET SİNİFİ F770 kN (LİF ÖZLÜ), ANMA ÇAP: 12mm (DAHL) / DEN -28 mm (DAHL'E KADAR OLANLAR)

02.05.2022
Belgelendirme Merkezi Başkanı Adına
ÖMER FARUK DÜMAN
SARAYIA BELGELENDİRME MÜDÜRÜ

1 / 1

infinite possibilities

MERKEZ OFİS

Seyitnizam Mah. Demirciler Sit.
10. Yol Aydaş İş Merkezi B Blok Kat:1
Zeytinburnu / İstanbul / TÜRKİYE
Tel : +90 212 634 04 44

ADANA

Acidere Mah. Hacı Sabancı Organize Sanayi
Bölgesi İnönü Bulvarı No: 22
Sarıçam / Adana / TÜRKİYE
Tel : +90 322 394 45 35

SİLİVRİ

Fevzipaşa Mah. Gölet Yolu Cad. 34580
Değirmenköy / Silivri / İstanbul / TÜRKİYE
Tel : +90 212 547 16 45

DÜZCE

D-100 Karayolu üzeri
Çaybükü Köyü Mevkii
Gümüşova / Düzce / TÜRKİYE
Tel : +90 380 731 35 50

COKYASAR**5** YEAR
50 *th*cokyasarholding.com.tr