




Product catalogue chemical anchors

High technology engineering adhesives

The logo for datka fix, featuring a white world map icon above the word "datka" in white and "fix" in white.

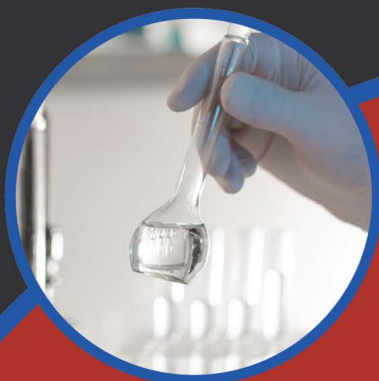

PE Polyester with Styrene Chemical Anchor

Polyester with styrene is a high performance general purpose two-component chemical anchoring system that has been formulated for anchoring in a wide variety of building materials.

PE – normal gel and cure time (standard grade)

PE-E – slow gel and fast cure time for high-temperature environments
(extended gel time / tropical grade)

PE-C – fast gel and fast cure time for cold-temperature environments
(winter grade)

NAME	PACKAGING	ITEMS (PER BOX)	ITEMS (PER PARCEL)	ITEMS (PER PALLET)
PE	300 ml	20	75	1500
PE	345 ml	12	100	1200
PE	410 ml	12	100	1200



PESF Polyester Styrene Free Chemical Anchor

Polyester styrene free is a universal bonded anchoring system for use in hollow and solid substrates within dry, wet or flooded conditions formulated free of styrene, PESF has a very low odour and is ideal for use in confined spaces and indoors.

PESF – normal gel and cure time (standard grade)

PESF-E – slow gel and fast cure time for high-temperature environments (extended gel time / tropical grade)

PESF-C – fast gel and fast cure time for cold-temperature environments (winter grade)

NAME	PACKAGING	ITEMS (PER BOX)	ITEMS (PER PARCEL)	ITEMS (PER PALLET)
PESF	300 ml	20	75	1500
PESF	345 ml	12	100	1200
PESF	410 ml	12	100	1200



EASF Epoxy Acrylate Styrene Free Chemical Anchor

EASF offers outstanding performance in concrete, masonry, and other substrates. It is ideally suited for high load/heavy duty structural anchoring applications of studs, threaded bars, starter bars and dowels. Being free of styrene, our EASF formulation has a very low odour and is well suited for use indoors and in confined spaces. It has a very low VOC content.

EASF – normal gel and cure time (standard grade)

EASF-E – slow gel and fast cure time for high-temperature environments (extended gel time / tropical grade)

EASF-A – fast gel and fast cure time for cold-temperature environments (arctic grade)

NAME	PACKAGING	ITEMS (PER BOX)	ITEMS (PER PARCEL)	ITEMS (PER PALLET)
EASF	300 ml	20	75	1500
EASF	345 ml	12	100	1200
EASF	410 ml	12	100	1200



EP 1000 Pure Epoxy Chemical Anchor

EP is a ultimate performance two-component pure epoxy bonded anchoring system for use in cracked and uncracked concrete under normal as well as seismic conditions. It works perfectly down to -5 °C, cures fast and has high strenght.

NAME	PACKAGING	ITEMS (PER BOX)	ITEMS (PER PARCEL)	ITEMS (PER PALLET)
EP	385 ml	12	100	1200
EP	585 ml	12	100	1200



Comparison Table

MECHANICAL VALUES	RESIN TYPE	ETA APPROVAL
Low (4/10)	PE	Option 7
	PESF	Pending Option 7
Medium (5/10)	VE	On Process
	VESF	On Process
High (7/10)	EASF	Option I - Seismic C1
Ultimate (9/10)	HUM	Pending Option I - Seismic C2
Ultimate (10/10)	EP	Pending Option I - Seismic C2

Minimum Order Quantity Requirements

PACKAGING	FOR LABELS (Pcs)	FOR BOX (Pcs)
300 ml	6000	12000
345 ml	6000	12000
410 ml	6000	12000
585 ml	3000	6000
385 ml	3000	6000



Product catalogue chemical anchors

High technology engineering adhesives





Kültür Mahallesi Mithatpaşa Caddesi No:45/1
Çankaya Ankara/TÜRKİYE
Telefon: : +90 537 265 41 64
www.datkafix.com